

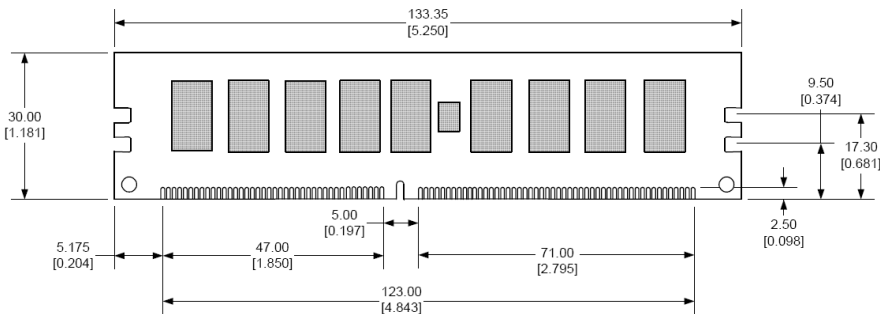
Products in Family

GRF1600U/4GB (1 x 4GB 2Rx8 DIMM)
 GRF1600U/8GB (1 x 8GB 2Rx8 DIMM)

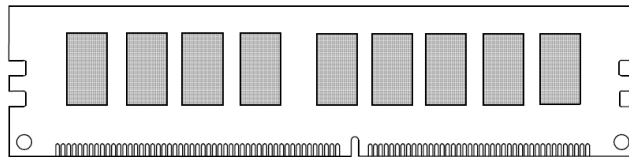


Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 12.8 Gigabytes/sec Operating Voltage: 1.5 V \pm 0.075 Fully RoHS Compliant	Each GRF1600U upgrade consists of a single DGR3-1600 Unbuffered ECC DIMM that conforms to JEDEC's DGR3, PC3-12800 standard. One 2K-bit EEPROM is used for Serial Presence Detect.

Dataram Product	Fujitsu Product	Product Description
GRF1600U/4GB	S26361-F3719-E514	4GB 2Rx8 PC3-12800E-11-11
GRF1600U/8GB	S26361-F3719-E515	8GB 2Rx8 PC3-12800E-11-11

Front view

Notes

Tolerances on all dimensions except where otherwise indicated are \pm .13 (.005).
 All dimensions are expressed in millimeters [inches]

Back view

Side view
