

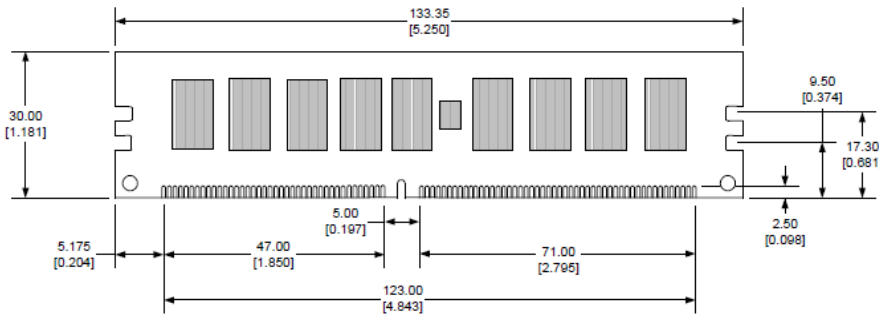
**Products in Family**

DRH165G7U/4GB (1 x 4GB 1Rx4 DIMM)



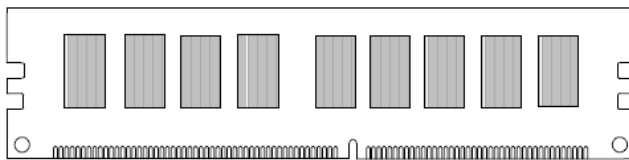
Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.5 V ±0.075 Fully RoHS Compliant Thermal Sensor	Each DRH165G7U upgrade consists of a single DDR3-1333 Unbuffered ECC DIMM that conforms to JEDEC's DDR3, PC3-10600 standard. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL with Address and Command Parity is also used. A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C.

Dataram Product	HP Product	Supported in these HP systems:
DRH165G7U/4GB	593923-B21	HP ProLiant BL465c G7, BL685c G7, DL165 G7, DL385 G7, DL585 G7, SL165z G7

**Front view**

**Notes**

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters [inches]

**Back view**

**Side view**
