


Products in Family


DRI750/8GB (2 x 4GB 2Rx8 DIMMs)
 DRI740/16GB (2 x 8GB 2Rx4 DIMMs)
 DRI750/16GB (2 x 8GB 4Rx8 DIMMs)
 DRI750/32GB (2 x 16GB 4Rx4 DIMMs)

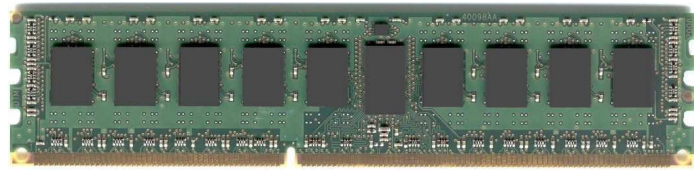

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.5 V ±0.075 Fully RoHS Compliant Thermal Sensor	Each DRI750 and DRI740 upgrade consists of two DDR3-1066 Registered ECC DIMMs that conform to JEDEC's DDR3, PC3-8500 standard. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL with Address and Command Parity is also used. A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C.

Dataram Product	IBM Product	Supported in these IBM systems:
DRI750/8GB DRI740/16GB DRI750/16GB DRI750/32GB	4526 4529 4527 4528	Power 710 and 730 (8231-E2B), Power 720 (8202-E4B), Power 740 (8205-E6B), Power 750 (8233-E8B), Power 755 (8236-E8C)
<i>Note: Not all products supported in all systems. See IBM or Dataram websites for specific memory options for your model.</i>		


Front view

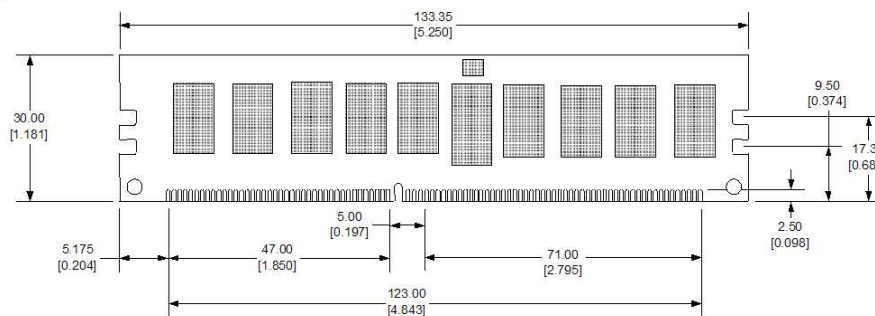

Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).
 All dimensions are expressed in millimeters [inches]

Back view

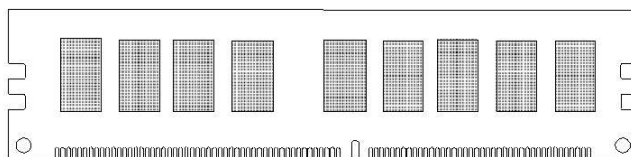

Side view

