


Products in Family


GRI740L/8GB (2 x 4GB 2Rx8 DIMMs)
 GRI740L/16GB (2 x 8GB 2Rx4 DIMMs)
 GRI740L/32GB (2 x 16GB 4Rx4 DIMMs)

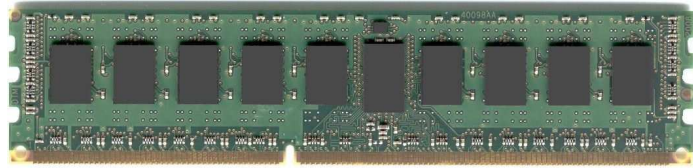

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.35V(1.28V~1.45V) Fully RoHS Compliant Thermal Sensor	Each GRI740L upgrade consists of two DGR3-1333 Registered ECC DIMMs that conform to JEDEC's DGR3, PC3L-10600 standard. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL with AdGress and Command Parity is also used. A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C. <i>Note: the 32GB kit (16GB DIMMs) is PC3L-8500 / DGR3-1066</i>

Dataram Product	IBM Product	Supported in these IBM systems:
GRI740L/8GB GRI740L/16GB GRI740L/32GB	EM08 EM16 EM32	Power 710 (8231-E1C), 730 (8231-E2C), Power 720 (8202-E4C), Power 740 (8205-E6C)

Front view

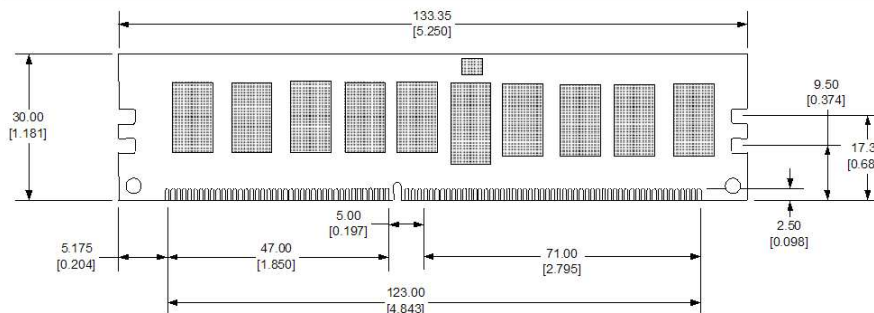


Notes

Tolerances on all dimensions except where otherwise indicated are $\pm .13$ (.005).

All dimensions are expressed in millimeters [inches]

Back view

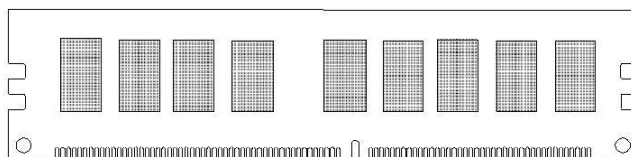

Side view

