


Products in Family


DRIX1333U/2GB (1 x 2GB 2Rx8 DIMM)
 DRIX1333U/4GB (1 x 4GB 2Rx8 DIMM)
 DRIX1333U/8GB (1 x 8GB 2Rx8 DIMM)

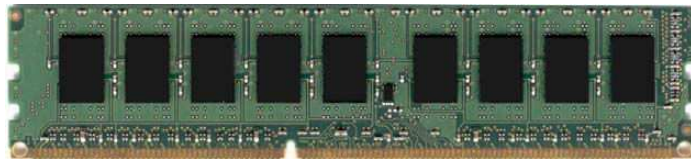

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.5 V \pm 0.075 Fully RoHS Compliant	Each DRIX1333U upgrade consists of a single DDR3-1333 Unbuffered ECC DIMM that conforms to JEDEC's DDR3, PC3-10600 standard. One 2K-bit EEPROM is used for Serial Presence Detect.

Dataram Product	IBM Product	Supported in these IBM systems:
DRIX1333U/2GB DRIX1333U/4GB DRIX1333U/8GB	44T1569 44T1571 90Y3165	Numerous IBM System x server models


Front view

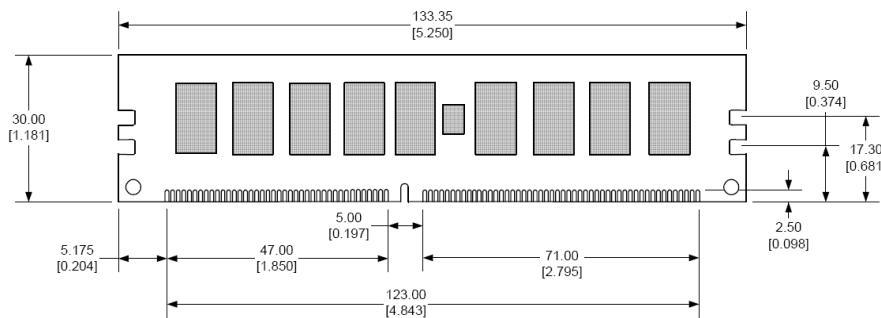

Notes

Tolerances on all dimensions except where otherwise indicated are \pm .13 (.005).
 All dimensions are expressed in millimeters [inches]

Back view

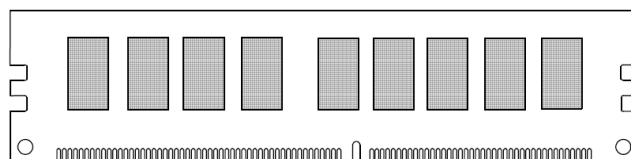

Side view

