



### Identification

2GB 1Rx8 PC3-12800S-11-11-B3  
DTM64616A 256Mx64

### Performance range

Clock / Module Speed / CL-t<sub>RCD</sub> -t<sub>RP</sub>

800 MHz / DDR3-1600 / 11-11-11  
667 MHz / DDR3-1333 / 10-10-10  
667 MHz / DDR3-1333 / 9-9-9  
533 MHz / DDR3-1066 / 8-8-8  
533 MHz / DDR3-1066 / 7-7-7  
400 MHz / DDR3-800 / 6-6-6  
333 MHz / DDR3-667 / 5-5-5

### Features

204-pin SO-DIMM. Dual-sided assembly 67.60 mm [2.661"] wide by 30.0 mm [1.181"] high

Operating Voltage: 1.5 V ±0.075 V

I/O Type: SSTL\_15

Data Transfer Rate: 12.8 Gigabytes/sec

Data Bursts: 8 and burst chop 4 mode

ZQ Calibration for Output Driver and On-Die Termination (ODT)

Programmable ODT / Dynamic ODT during Writes

Programmable CAS Latency: 5, 6, 7, 8, 9, 10, and 11

Differential Data Strobe signals

SDRAM Addressing (Row/Col/Bank): 15/10/3

Fully RoHS Compliant

### Description

DTM64616A is a non-ECC Unbuffered DDR3-1600, 256Mx64 memory module which conforms to JEDEC's PC3-12800 standard. The assembly is comprised of one Rank. The Rank is comprised of eight Hynix 256Mx8 DDR3 SDRAMs. One 2K-bit EEPROM is used for Serial Presence Detect.

Both output driver strength and input termination impedance are programmable to maintain signal integrity on the I/O signals.

The assembly is a Small Outline Dual In-line Memory Module intended for mounting into 204-pin edge connector sockets.


### Pin Configuration

### Pin Description


Front Side				Back Side				Name	Function	
1	V <sub>REFDQ</sub>	53 DQ19	105 V <sub>DD</sub>	157 DQ42	2 V <sub>SS</sub>	54 V <sub>SS</sub>	106 V <sub>DD</sub>	158 DQ46	DQ[63:0]	Data Bits
3	V <sub>SS</sub>	55 V <sub>SS</sub>	107 A10/AP	159 DQ43	4 DQ4	56 DQ28	108 BA1	160 DQ47	DQS[7:0], /DQS[7:0]	Differential Data Strobes
5	DQ0	57 DQ24	109 BA0	161 V <sub>SS</sub>	6 DQ5	58 DQ29	110 /RAS	162 V <sub>SS</sub>	DM[7:0]	Data Mask
7	DQ1	59 DQ25	111 V <sub>DD</sub>	163 DQ48	8 V <sub>SS</sub>	60 V <sub>SS</sub>	112 V <sub>DD</sub>	164 DQ52	CK[1:0], /CK[1:0]	Differential Clock Inputs
9	V <sub>SS</sub>	61 V <sub>SS</sub>	113 /WE	165 DQ49	10 /DQS0	62 /DQS3	114 /S0	166 DQ53	CKE[1:0]	Clock Enables
11	DM0	63 DM3	115 /CAS	167 V <sub>SS</sub>	12 DQS0	64 DQS3	116 ODT0	168 V <sub>SS</sub>	/CAS	Column Address Strobe
13	V <sub>SS</sub>	65 V <sub>SS</sub>	117 V <sub>DD</sub>	169 /DQS6	14 V <sub>SS</sub>	66 V <sub>SS</sub>	118 V <sub>DD</sub>	170 DM6	/RAS	Row Address Strobe
15	DQ2	67 DQ26	119 A13	171 DQS6	16 DQ6	68 DQ30	120 ODT1*	172 V <sub>SS</sub>	/S[1:0]	Chip Selects
17	DQ3	69 DQ27	121 /S1*	173 V <sub>SS</sub>	18 DQ7	70 DQ31	122 NC	174 DQ54	/WE	Write Enable
19	V <sub>SS</sub>	71 V <sub>SS</sub>	123 V <sub>DD</sub>	175 DQ50	20 V <sub>SS</sub>	72 V <sub>SS</sub>	124 V <sub>DD</sub>	176 DQ55	A[15:0]	Address Inputs
21	DQ8	73 CKE0	125 NC/TEST	177 DQ51	22 DQ12	74 CKE1*	126 V <sub>REFCA</sub>	178 V <sub>SS</sub>	BA[2:0]	Bank Addresses
23	DQ9	75 V <sub>DD</sub>	127 V <sub>SS</sub>	179 V <sub>SS</sub>	24 DQ13	76 V <sub>DD</sub>	128 V <sub>SS</sub>	180 DQ60	ODT[1:0]	On Die Termination Inputs
25	V <sub>SS</sub>	77 NC	129 DQ32	181 DQ56	26 V <sub>SS</sub>	78 A15*	130 DQ36	182 DQ61	SA[1:0]	SPD Address
27	/DQS1	79 BA2	131 DQ33	183 DQ57	28 DM1	80 A14	132 DQ37	184 V <sub>SS</sub>	SCL	SPD Clock Input
29	DQS1	81 V <sub>DD</sub>	133 V <sub>SS</sub>	185 V <sub>SS</sub>	30 /RESET	82 V <sub>DD</sub>	134 V <sub>SS</sub>	186 /DQS7	SDA	SPD Data Input/Output
31	V <sub>SS</sub>	83 A12/BC	135 /DQS4	187 DM7	32 V <sub>SS</sub>	84 A11	136 DM4	188 DQS7	TEST	Logic Analyzer specific
33	DQ10	85 A9	137 DQS4	189 V <sub>SS</sub>	34 DQ14	86 A7	138 V <sub>SS</sub>	190 V <sub>SS</sub>	V <sub>SS</sub>	Ground
35	DQ11	87 V <sub>DD</sub>	139 V <sub>SS</sub>	191 DQ58	36 DQ15	88 V <sub>DD</sub>	140 DQ38	192 DQ62	V <sub>DD</sub>	Power
37	V <sub>SS</sub>	89 A8	141 DQ34	193 DQ59	38 V <sub>SS</sub>	90 A6	142 DQ39	194 DQ63	V <sub>DDSPD</sub>	SPD EEPROM Power
39	DQ16	91 A5	143 DQ35	195 V <sub>SS</sub>	40 DQ20	92 A4	144 V <sub>SS</sub>	196 V <sub>SS</sub>	V <sub>REFDQ</sub>	Reference Voltage for DQ
41	DQ17	93 V <sub>DD</sub>	145 V <sub>SS</sub>	197 SA0	42 DQ21	94 V <sub>DD</sub>	146 DQ44	198 NC	V <sub>REFCA</sub>	Reference Voltage for CA
43	V <sub>SS</sub>	95 A3	147 DQ40	199 V <sub>DDSPD</sub>	44 V <sub>SS</sub>	96 A2	148 DQ45	200 SDA	V <sub>TT</sub>	Termination Voltage
45	/DQS2	97 A1	149 DQ41	201 SA1	46 DM2	98 A0	150 V <sub>SS</sub>	202 SCL	NC	No Connection
47	DQS2	99 V <sub>DD</sub>	151 V <sub>SS</sub>	203 V <sub>TT</sub>	48 V <sub>SS</sub>	100 V <sub>DD</sub>	152 /DQS5	204 V <sub>TT</sub>		
49	V <sub>SS</sub>	101 CK0	153 DM5	50 DQ22	102 CK1*	154 DQS5				
51	DQ18	103 /CK0	155 V <sub>SS</sub>	52 DQ23	104 /CK1*	156 V <sub>SS</sub>				

\* = Not Used


## Front view

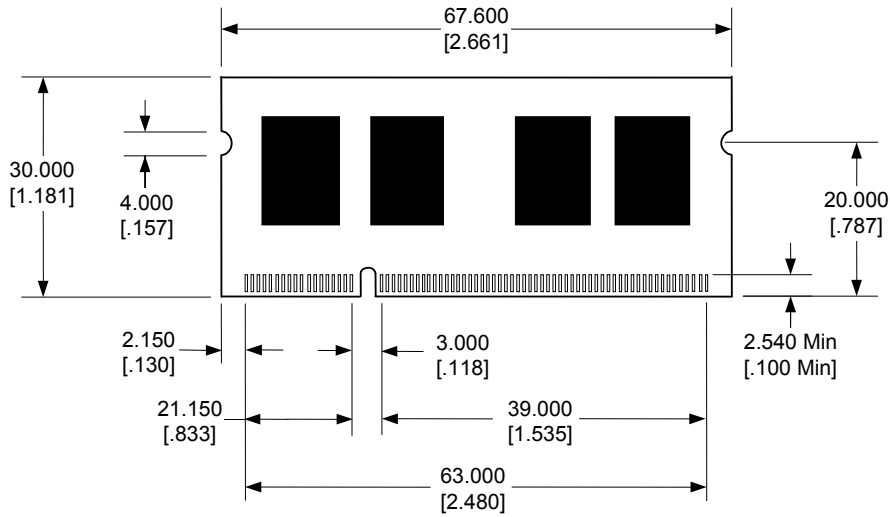

## Back view

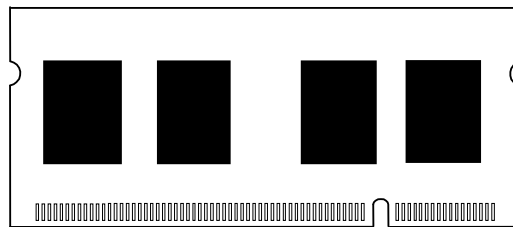


## Side view

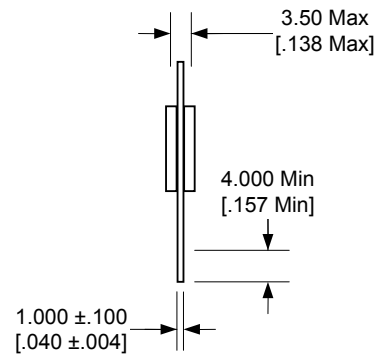



### Notes

Tolerances on all dimensions except where otherwise indicated are  $\pm .15$  (.0059).

All dimensions are expressed: millimeters [inches]

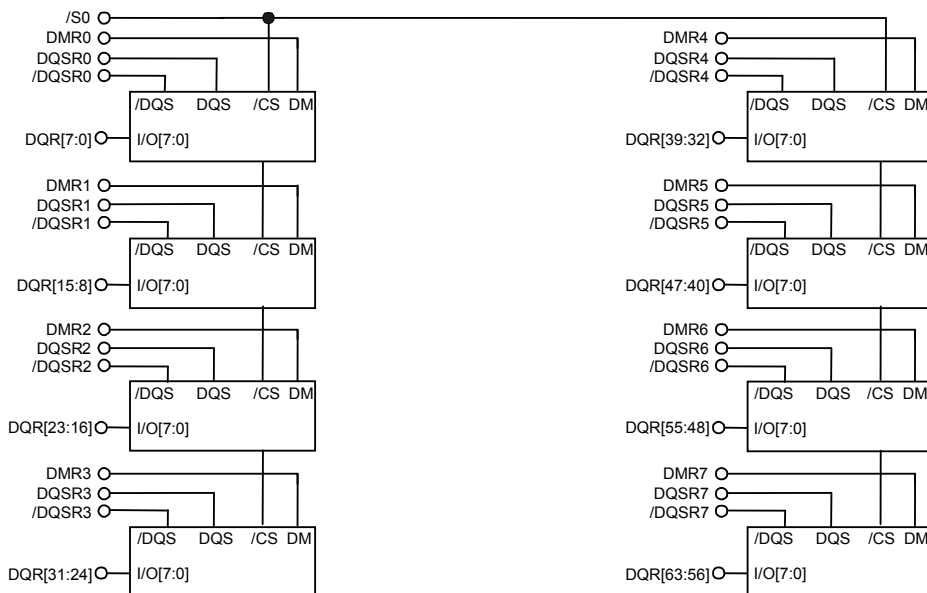


**All 15 OHMS**

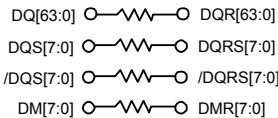


**GLOBAL SDRAM CONNECTS**


**All 36 OHMS**

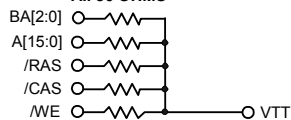


**All 36 OHMS**

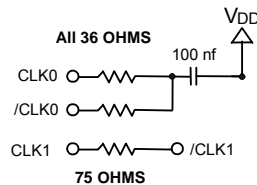



**All 36 OHMS**



**All 240 OHMS**



**DECOUPLING**

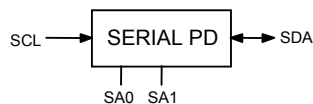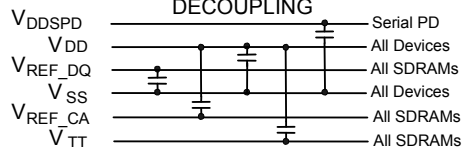

### Absolute Maximum Ratings

(Note: Operation at or above Absolute Maximum Ratings can adversely affect module reliability.)

PARAMETER	Symbol	Minimum	Maximum	Unit
Temperature, non-Operating	T <sub>STORAGE</sub>	-55	100	C
Module Ambient Temperature, Operating	T <sub>A</sub>	-40	95	C
DRAM Case Temperature, Operating	T <sub>CASE</sub>	-40	95	C
Voltage on V <sub>DD</sub> relative to V <sub>SS</sub>	V <sub>DD</sub>	-0.4	1.975	V
Voltage on Any Pin relative to V <sub>SS</sub>	V <sub>IN</sub> , V <sub>OUT</sub>	-0.4	1.975	V

Notes:

DRAM Operating Case Temperature above 85C requires 2X refresh.

### Recommended DC Operating Conditions (T<sub>A</sub> = 0 to 70 C, Voltage referenced to V<sub>SS</sub> = 0 V)

PARAMETER	Symbol	Minimum	Typical	Maximum	Unit	Note
Power Supply Voltage	V <sub>DD</sub>	1.425	1.5	1.575	V	
I/O Reference Voltage	V <sub>REFDQ</sub>	0.49 V <sub>DD</sub>	0.50 V <sub>DD</sub>	0.51 V <sub>DD</sub>	V	1
I/O Reference Voltage	V <sub>REFCA</sub>	0.49 V <sub>DD</sub>	0.50 V <sub>DD</sub>	0.51 V <sub>DD</sub>	V	1

Notes:

The value of V<sub>REF</sub> is expected to equal one-half V<sub>DD</sub> and to track variations in the V<sub>DD</sub> DC level. Peak-to-peak noise on V<sub>REF</sub> may not exceed ±1% of its DC value. For Reference: V<sub>DD</sub>/2 ± 15 mV.

### DC Input Logic Levels, Single-Ended (T<sub>A</sub> = 0 to 70 C, Voltage referenced to V<sub>SS</sub> = 0 V)

PARAMETER	Symbol	Minimum	Maximum	Unit
Logical High (Logic 1)	V <sub>IH(DC)</sub>	V <sub>REF</sub> + 0.1	V <sub>DD</sub>	V
Logical Low (Logic 0)	V <sub>IL(DC)</sub>	V <sub>SS</sub>	V <sub>REF</sub> - 0.1	V

### AC Input Logic Levels, Single-Ended (T<sub>A</sub> = 0 to 70 C, Voltage referenced to V<sub>SS</sub> = 0 V)

PARAMETER	Symbol	Minimum	Maximum	Unit
Logical High (Logic 1)	V <sub>IH(AC)</sub>	V <sub>REF</sub> + 0.175	-	V
Logical Low (Logic 0)	V <sub>IL(AC)</sub>	-	V <sub>REF</sub> - 0.175	V

**Differential Input Logic Levels** ( $T_A = 0$  to  $70$  C, Voltage referenced to  $V_{SS} = 0$  V)

PARAMETER	Symbol	Minimum	Maximum	Unit	Note
Differential Input Logic High	$V_{IH,DIFF}$	+0.200	DC: $V_{DD}$ AC: $V_{DD}+0.4$	V	1
Differential Input Logic Low	$V_{IL,DIFF}$	DC: $V_{SS}$ AC: $V_{SS}-0.4$	-0.200	V	2
Differential Input Cross Point Voltage relative to $V_{DD}/2$	$V_{IX}$	- 0.150	+ 0.150	V	4

**Capacitance** ( $T_A = 25$  C,  $f = 100$  MHz)

PARAMETER	Pin	Symbol	Minimum	Maximum	Unit
Input Capacitance, Clock	CK0, /CK0	$C_{CK}$	6.4	12.8	pF
Input Capacitance, Address	BA[2:0], A[14:0], /RAS, /CAS, /WE	$C_I$	6	10.4	pF
Input Capacitance Control	/S0, CKE0, ODT0	$C_I$	6	10.4	pF
Input/Output Capacitance	DQ[63:0], DQS[7:0], /DQS[7:0], DM[7:0]	$C_{IO}$	1.5	2.5	pF

**DC Characteristics** ( $T_A = 0$  to  $70$  C, Voltage referenced to  $V_{SS} = 0$  V)

PARAMETER	Symbol	Minimum	Maximum	Unit	Note
Input Leakage Current (Any input $0$ V < $V_{IN}$ < $V_{DD}$ )	$I_{IL}$	-8	+8	$\mu$ A	1,2
Output Leakage Current ( $0$ V < $V_{OUT}$ < $V_{DDQ}$ )	$I_{OL}$	-5	+5	$\mu$ A	2,3

## Notes:

- 1) All other pins not under test = 0 V
- 2) Values are shown per pin
- 3) DQ's, DQS, DQS and ODT are disabled

**I<sub>DD</sub> Specifications and Conditions** (T<sub>A</sub> = 0 to 70 C, Voltage referenced to V<sub>SS</sub> = 0 V)

PARAMETER	Symbol	Test Condition	Max Value	Unit
Operating One Bank Active-Precharge Current	I <sub>DD0</sub>	Operating current : One bank ACTIVATE-to-PRECHARGE	264	mA
Operating One Bank Active-Read-Precharge Current	I <sub>DD1</sub>	Operating current : One bank ACTIVATE-to-READ-to-PRECHARGE	320	mA
Precharge Power-Down Current	I <sub>DD2P</sub>	Precharge power down current: (Slow exit)	64	mA
Precharge Power-Down Current	I <sub>DD2P</sub>	Precharge power down current: (Fast exit)	80	mA
Precharge Quiet Standby Current	I <sub>DD2Q</sub>	Precharge quiet standby current	136	mA
Precharge Standby Current	I <sub>DD2N</sub>	Precharge standby current	136	mA
Active Power-Down Current	I <sub>DD3P</sub>	Active power-down current	144	mA
Active Standby Current	I <sub>DD3N</sub>	Active standby current	208	mA
Operating Burst Write Current	I <sub>DD4W</sub>	Burst write operating current	720	mA
Operating Burst Read Current	I <sub>DD4R</sub>	Burst read operating current	680	mA
Burst Refresh Current	I <sub>DD5</sub>	Refresh current	1600	mA
Self Refresh Current	I <sub>DD6</sub>	Self-refresh temperature current: MAX T <sub>c</sub> = 85°C	96	mA
Operating Bank Interleave Read Current	I <sub>DD7</sub>	All bank interleaved read current	1080	mA

## AC Operating Conditions

PARAMETER	Symbol	Min	Max	Unit
Internal read command to first data	$t_{AA}$	13.125	20	ns
CAS-to-CAS Command Delay	$t_{CCD}$	4	-	$t_{CK}$
Clock High Level Width	$t_{CH(avg)}$	0.47	0.53	$t_{CK}$
Clock Cycle Time	$t_{CK}$	1.25	2.5	ns
Clock Low Level Width	$t_{CL(avg)}$	0.47	0.53	$t_{CK}$
Data Input Hold Time after DQS Strobe	$t_{DH}$	45	-	ps
DQ Input Pulse Width	$t_{DIPW}$	360	-	ps
DQS Output Access Time from Clock	$t_{DQSCK}$	-225	+225	ps
Write DQS High Level Width	$t_{DQSH}$	0.45	0.55	$t_{CK(avg)}$
Write DQS Low Level Width	$t_{DQSL}$	0.45	0.55	$t_{CK(avg)}$
DQS-Out Edge to Data-Out Edge Skew	$t_{DQSQ}$	-	125	ps
Data Input Setup Time Before DQS Strobe	$t_{DS}$	10	-	ps
DQS Falling Edge from Clock, Hold Time	$t_{DSH}$	0.9	-	$t_{CK(avg)}$
DQS Falling Edge to Clock, Setup Time	$t_{DSS}$	0.3	-	$t_{CK(avg)}$
Address and Command Hold Time after Clock	$t_{IH}$	120	-	ps
Address and Command Setup Time before Clock	$t_{IS}$	45	-	ps
Load Mode Command Cycle Time	$t_{MRD}$	4	-	$t_{CK}$
DQ-to-DQS Hold	$t_{QH}$	0.38	-	$t_{CK(avg)}$
Active-to-Precharge Time	$t_{RAS}$	35	$9 \cdot t_{REFI}$	ns
Active-to-Active / Auto Refresh Time	$t_{RC}$	48.125	-	ns
RAS-to-CAS Delay	$t_{RCD}$	13.125	-	ns
Average Periodic Refresh Interval $0^{\circ} C \leq T_{CASE} < 85^{\circ} C$	$t_{REFI}$	-	7.8	$\mu s$
Average Periodic Refresh Interval $85^{\circ} C \leq T_{CASE} < 95^{\circ} C$	$t_{REFI}$	-	3.9	$\mu s$
Auto Refresh Row Cycle Time	$t_{RFC}$	160	-	ns
Row Precharge Time	$t_{RP}$	13.125	-	ns
Read DQS Preamble Time	$t_{RPRE}$	0.9	Note 1	$t_{CK(avg)}$
Read DQS Postamble Time	$t_{RPST}$	0.3	Note 2	$t_{CK(avg)}$
Row Active to Row Active Delay	$t_{RRD}$	Max(4nCK, 6ns)	-	ns
Internal Read to Precharge Command Delay	$t_{RTP}$	Max(4nCK, 7.5ns)	-	ns
Write DQS Preamble Setup Time	$t_{WPRE}$	0.9	-	$t_{CK(avg)}$
Write DQS Postamble Time	$t_{WPST}$	0.3	-	$t_{CK(avg)}$
Write Recovery Time	$t_{WR}$	15	-	ns
Internal Write to Read Command Delay	$t_{WTR}$	Max(4nCK, 7.5ns)	-	ns

Notes:

1. The maximum preamble is bound by  $t_{LZDQS}(\min)$
2. The maximum postamble is bound by  $t_{HZDQS}(\max)$

SPD available upon request.



# DTM64616A

2GB - 256Mx64 204-pin non-ECC DDR3 Unbuffered SO-DIMM

---



DATARAM CORPORATION, USA Corporate Headquarters, P.O. Box 7528, Princeton, NJ 08543-7528;  
Voice: 609-799-0071, Fax: 609-799-6734; [www.dataram.com](http://www.dataram.com)

All rights reserved.

The information contained in this document has been carefully checked and is believed to be reliable. However, Dataram assumes no responsibility for inaccuracies.

The information contained in this document does not convey any license under the copyrights, patent rights or trademarks claimed and owned by Dataram.

No part of this publication may be copied or reproduced in any form or by any means, or transferred to any third party without prior written consent of Dataram.