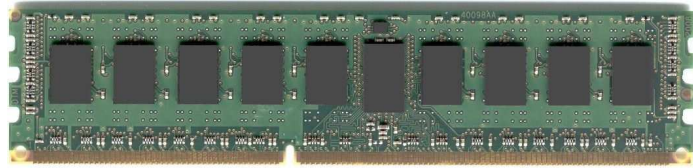


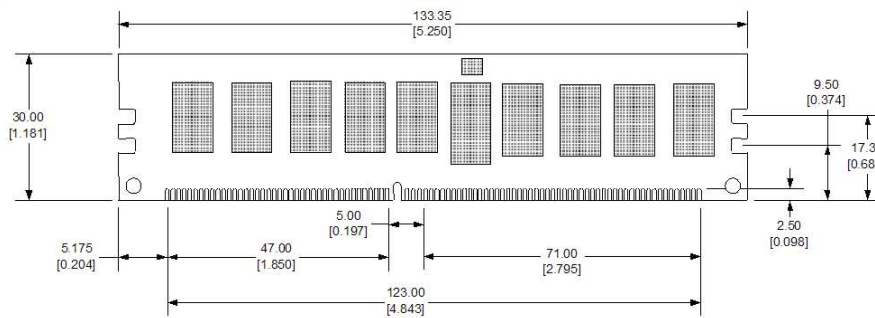
Products in Family

DRST4/8GB (2 x 4GB 2Rx8 DIMMs)
 DRST4/16GB (2 x 8GB 2Rx4 DIMMs)
 DRST4/32GB (2 x 16GB 4Rx4 DIMMs)

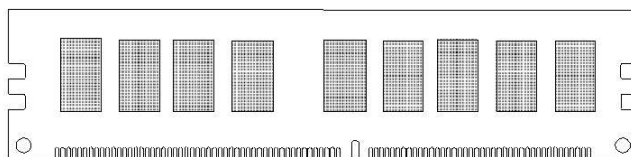


Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.35V(1.28V~1.45V) & 1.5V(1.425V~1.575V) Fully RoHS Compliant Thermal Sensor	Each DRST4 upgrade consists of a matched pair of DDR3L-1333 Registered ECC DIMMs that conforms to JEDEC's DDR3, PC3L-10600 standard. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL with Address and Command Parity is also used. A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C. Note: The 16GB DIMM is DDR3L-1066 PC3L-8500

Dataram Product	Sun Microsystems Product	Supported in these Sun Microsystems systems:
DRST4/8GB DRST4/16GB DRST4/32GB	7101696 7101697 7101698	Oracle / Sun SPARC T4-1, T4-2, T4-4, and T4-1B Server Module

Front view

Notes

Tolerances on all dimensions except where otherwise indicated are $\pm .13$ (.005).
 All dimensions are expressed in millimeters [inches]

Back view

Side view
