



### Products in Family

GRST5220/2GB (2 x 1GB 2Rx8 DIMMs)  
 GRST5220/4GB (2 x 2GB 2Rx4 DIMMs)  
 GRST5220/8GB (2 x 4GB 2Rx4 DIMMs)

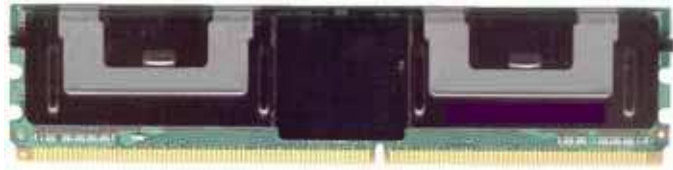

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30.35 mm high (1.195" x 5.25") Data Transfer Rate: 5.3 Gigabytes/sec Operating Voltage (Nominal): VDD = 1.8V; VCC = 1.5V Full DIMM Heat Spreader Fully RoHS Compliant	Each GRST5220 upgrade consists of a matched set of two DDR2-667 FB-DIMMs. One Advanced Memory Buffer (AMB) is used as the interface between the system memory bus and DIMM DRAMs. One 2K-bit EEPROM is used for Serial Presence Detect. For improved thermal performance, a Full DIMM Heat Spreader with thermal interface material (TIM) is attached to the front and back of the DIMM.

Dataram Product	Sun Microsystems Product	Supported in these Sun Microsystems systems:
GRST5220/2GB GRST5220/4GB GRST5220/8GB	SESX2A1Z, X4200A SESX2B1Z, X4203A SESX2C1Z, X4204A	Sun SPARC Enterprise T5120, T5140, T5220, T5420, T5440, Sun Blade T6320 Server Module, Netra T5220, T5440

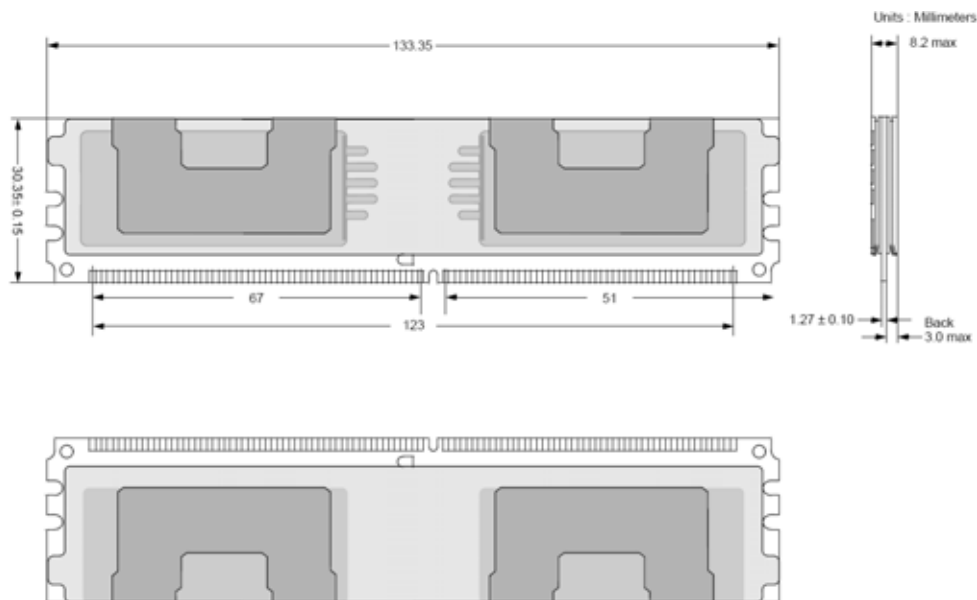

### Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters