

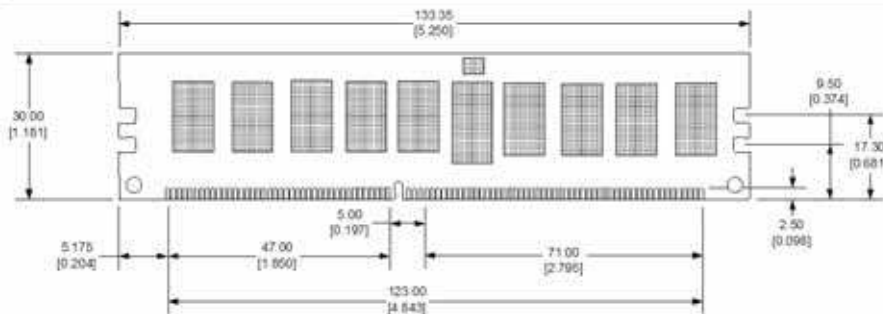
Products in Family

GRSX6275M2L/4GB (1 x 4GB 1Rx4 DIMM)
 GRSX6275M2L/8GB (1 x 8GB 2Rx4 DIMM)
 GRSX6275M2L/16GB (1 x 16GB 4Rx4 DIMM)

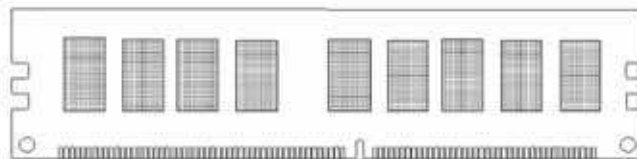


Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.35 V ±0.075 Fully RoHS Compliant Thermal Sensor	Each GRSX6275M2L upgrade consists of a single DDR3-1333 Registered ECC DIMM that conforms to JEDEC's DDR3, PC3L-10600 standard. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL with Address and Command Parity is also used. A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C. Note: The 16GB upgrade is a DDR3-1066, PCL-8500 DIMM.

Dataram Product	Oracle Sun Product	Supported in these Oracle Sun systems:
GRSX6275M2L/4GB GRSX6275M2L/8GB GRSX6275M2L/16GB	X4715A X4716A Not Offered by Oracle	Sun Blade X6275 M2 Server Module

Front view

Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).
 All dimensions are expressed in millimeters [inches]

Back view

Side view
