


Products in Family

DRSU40M2/8GB (2 x 4GB 2R DIMMs)
DRSU40M2/16GB (2 x 8GB 4R DIMMs)



Features		Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.20" x 5.25") Data Transfer Rate: 5.3 Gigabytes/sec Operating Voltage: 1.8 V ±0.1 Error Checking and Correction (ECC) bits Supports Intel SDDC and Chipkill Advanced ECC Features Fully RoHS Compliant		Each DRSU40M2 upgrade consists of a matched pair of DDR2-667 Registered DIMMs with address/command parity functionality. One 2K-bit EEPROM is used for Serial Presence Detect.
Dataram Product	Sun Microsystems Product	Supported in these Sun Microsystems systems:
DRSU40M2/8GB DRSU40M2/16GB	X5289A-Z Not Offered by Sun	Ultra 40 M2 Workstations

Front view

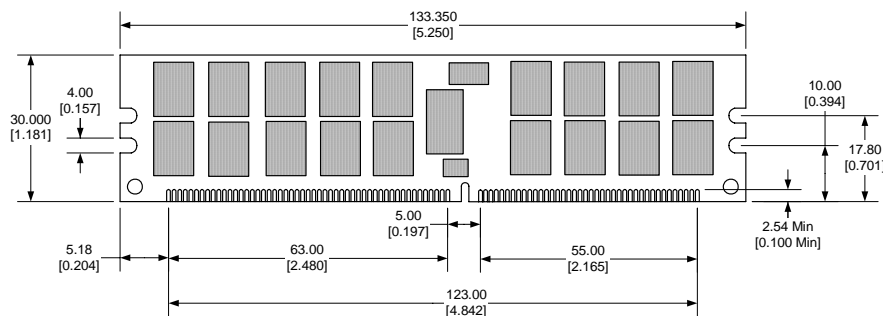


Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters [inches]

Back view

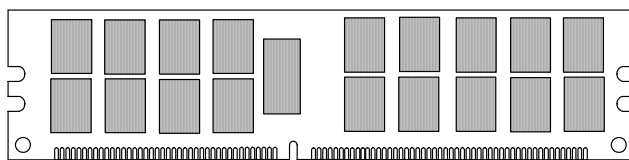

Side view

