


Products in Family

DRSX2270L/4GB (1 x 4GB 1Rx4 DIMM)
 DRSX2270L/8GB (1 x 8GB 2Rx4 DIMM)



Features		Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.35 V ±0.075 Fully RoHS Compliant Thermal Sensor		Each DRSX2270L upgrade consists of a single DDR3-1333 Registered ECC DIMM that conforms to JEDEC's DDR3, PC3L-10600 standard. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL with Address and Command Parity is also used. A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C.
Dataram Product	Oracle Sun Product	Supported in these Oracle Sun systems:
DRSX2270L/4GB DRSX2270L/8GB	X8362A X8361A	Sun Fire X2270 M2

Front view

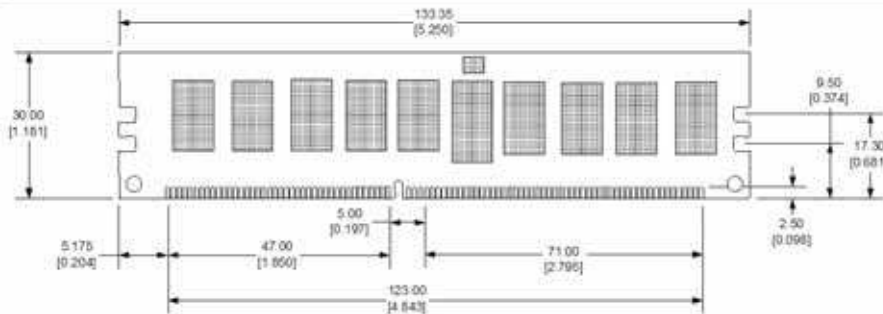


Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters [inches]

Back view

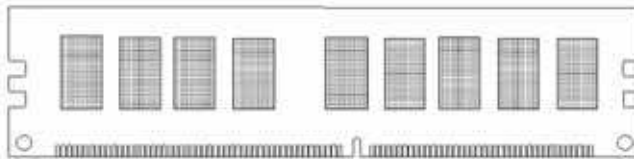

Side view

