


Products in Family

DRSX4800/8GB (2 x 4GB 2Rx4 DIMMs)
 DRSX4800/16GB (2 x 8GB 2Rx4 DIMMs)

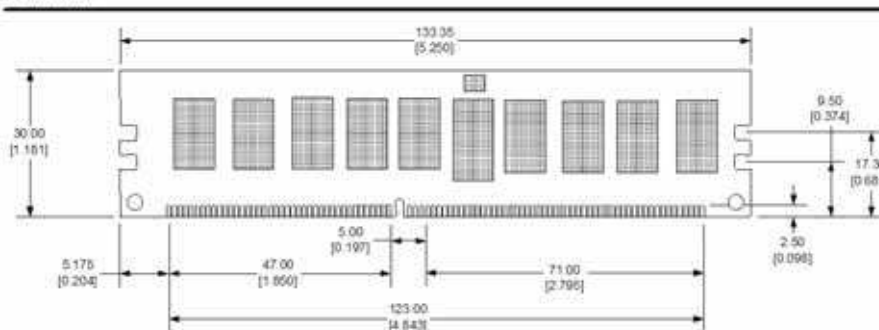


Features		Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 8.5 Gigabytes/sec Operating Voltage: 1.5 V ±0.075 Fully RoHS Compliant Thermal Sensor		Each DRSX4800 upgrade consists of a matched pair of DDR3-1066 Registered ECC DIMMs that conform to JEDEC's DDR3, PC3-8500 standard. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL with Address and Command Parity is also used. A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C.
Dataram Product	Sun Microsystems Product	Supported in these Sun Microsystems systems:
DRSX4800/8GB DRSX4800/16GB	X8461A X8462A	Sun Fire X4800

Front view

Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

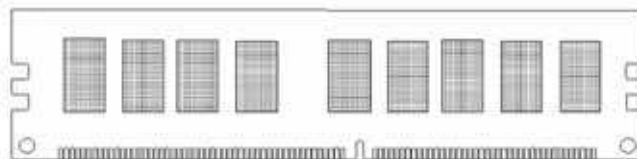All dimensions are expressed in millimeters [inches]

Back view

Side view
