


Products in Family

GRSX4440/4GB (2 x 2GB 1R DIMMs)
 GRSX4440/8GB (2 x 4GB 2R DIMMs)
 GRSX4440/16GB (2 x 8GB 2R DIMMs)



Features	Description	
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.20" x 5.25") Data Transfer Rate: 5.3 Gigabytes/sec Operating Voltage: 1.8 V ±0.1 Error Checking and Correction (ECC) bits Supports Intel SDDC and Chipkill Advanced ECC Features Fully RoHS Compliant	Each GRSX4440 upgrade consists of a matched pair of DDR2-667 Registered DIMMs with address/command parity functionality. One 2K-bit EEPROM is used for Serial Presence Detect.	
Dataram Product	Sun Microsystems Product	Supported in these Sun Microsystems systems:
GRSX4440/4GB GRSX4440/8GB GRSX4440/16GB	X6321A-C X6322A X4287A	Sun Fire X4140, Sun Fire X4240, Sun Fire X4440


Front view

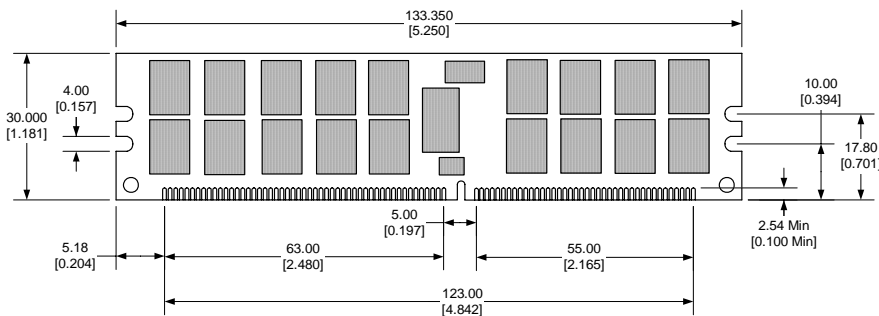

Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).
 All dimensions are expressed in millimeters [inches]

Back view

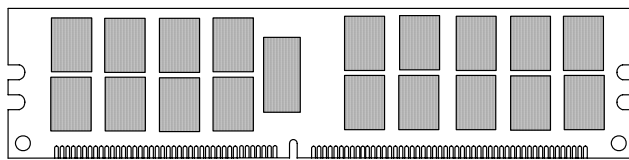

Side view

