


Plugs for pluggable terminal blocks / EC & ESD series



EC508FM

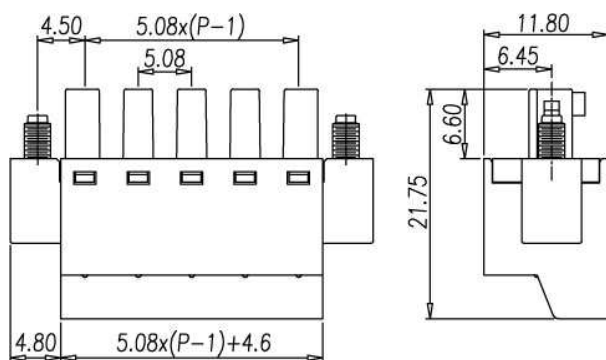

Pitch: 5.08mm

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	600V
Rated current	12A	14A
Conductor cross-section, solid (AWG/ mm ²)	28~14 / 0.2~1.5	
Conductor cross-section, flexible (AWG/ mm ²)	28~14 / 0.2~1.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 4/ 4 KV	
Torque (N-m)	0.29	
Screw	M2	
Wire strip length	6~7mm	
Pole	Cat. No.	
02	EC508FM-02P	
:	:	
:	:	
24	EC508FM-24P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw