


Plugs for pluggable terminal blocks / EC & ESD series



**EC116V**

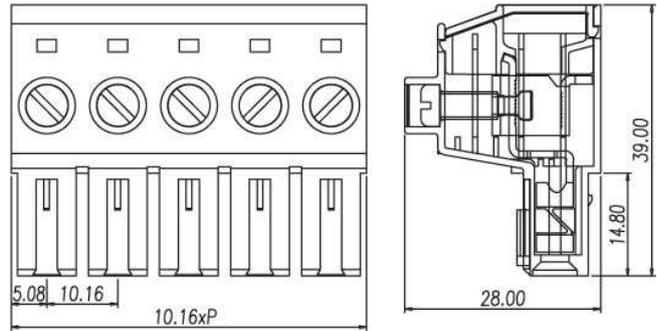

**Pitch: 10.16mm**

Approval	<b>UL</b>	
Technical Data	UL	IEC
Rated voltage	300V / 600V	750V
Rated current	51A / 5A	76A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	16~6 / 0.5~16	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	16~6 / 0.5~16	
Rated surge voltage (UL/IEC/Max.)	2.2 / 3.5 / KV	
Torque (N-m)	1.8	
Screw	M4	
Wire strip length	8~9mm	
Pole	Cat. No.	
02	EC116V-02P	
:	:	
:	:	
10	EC116V-10P	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw