


Plugs for pluggable terminal blocks / EC & ESD series



2ESDVBM

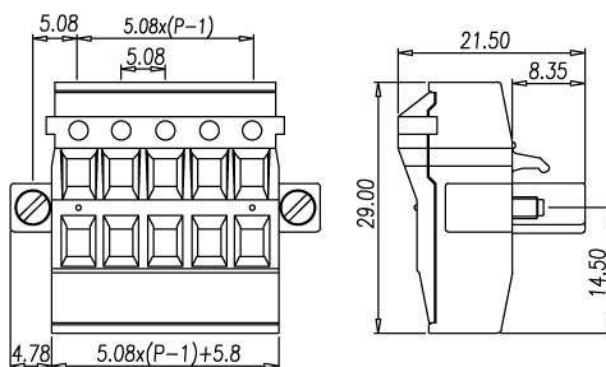

Pitch: 5.08mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	
Rated current	16A	
Conductor cross-section, solid (AWG/ mm ²)		
Conductor cross-section, flexible (AWG/ mm ²)	30~12	
Rated surge voltage (UL/IEC/Max.)	2/ / KV	
Torque (N-m)	0.60	
Screw	M2.5	
Wire strip length		
Pole	Cat. No.	
02	2ESDVBM-02P	
:	:	
:	:	
12	2ESDVBM-12P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw