


Spring plugs for pluggable terminal blocks / ESC & ESD series



ESC508VM

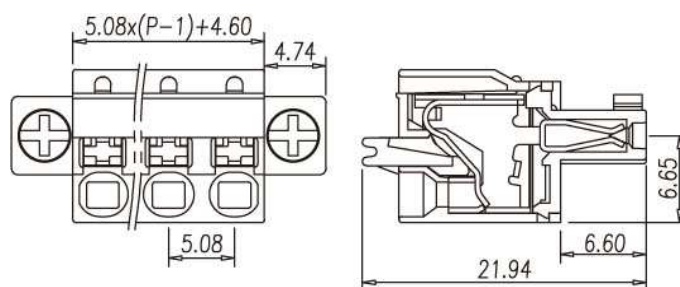

Pitch: 5.08mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	130V
Rated current	8A	8A
Conductor cross-section, solid (AWG/ mm ²)	28~16 / 0.5~1.5	
Conductor cross-section, flexible (AWG/ mm ²)	28~16 / 0.5~1.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / KV	
Torque (N-m)		
Screw		
Wire strip length	7~8mm	
Pole	Cat. No.	
02	ESC508VM-02P	
:	:	
:	:	
24	ESC508VM-24P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw