



Spring plugs for pluggable terminal blocks / ESC & ESD series

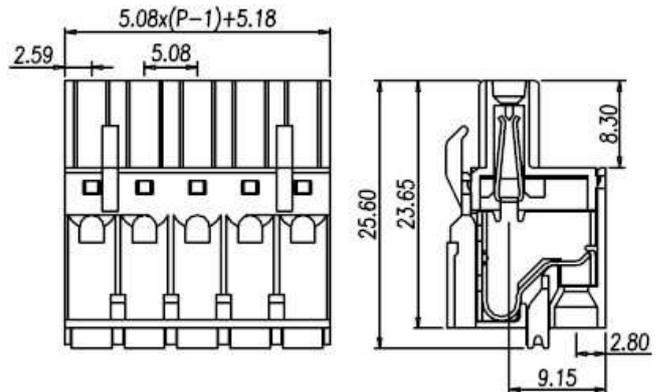

**2ESDS**

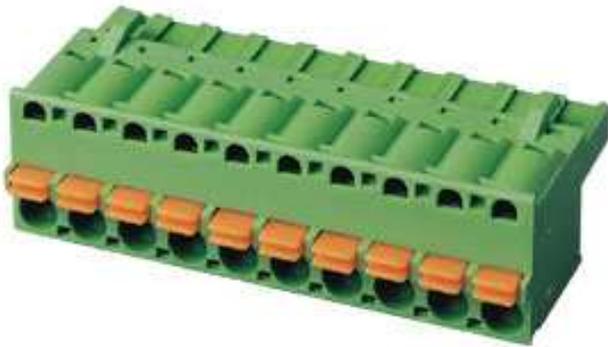

**Pitch: 5.08mm**

|   |                 |      |
|---|-----------------|------|
| Approval  |                 |      |
| Technical Data  | UL              | IEC  |
| Rated voltage   | 300V            | 250V |
| Rated current   | 10A             | 12A  |
| Conductor cross-section, solid (AWG/ mm <sup>2</sup> )    | 26~12 / 0.5~2.5 |      |
| Conductor cross-section, flexible (AWG/ mm <sup>2</sup> ) | 26~12 / 0.5~2.5 |      |
| Rated surge voltage (UL/IEC/Max.)                         | 1.6 / 2 / KV    |      |
| Torque (N-m)  |                 |      |
| Screw   |                 |      |
| Wire strip length   | 12mm            |      |
| Pole  | Cat. No.        |      |
| 02  | 2ESDS-02P       |      |
| :   | :               |      |
| :   | :               |      |
| 24  | 2ESDS-24P       |      |

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw