



# Plugs for pluggable terminal blocks / EC & ESD series

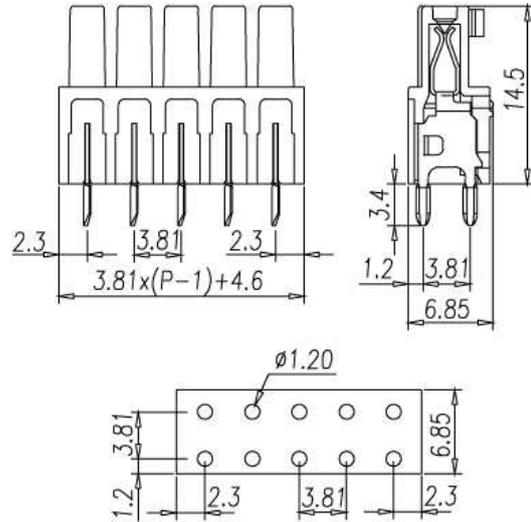

## EC381CV

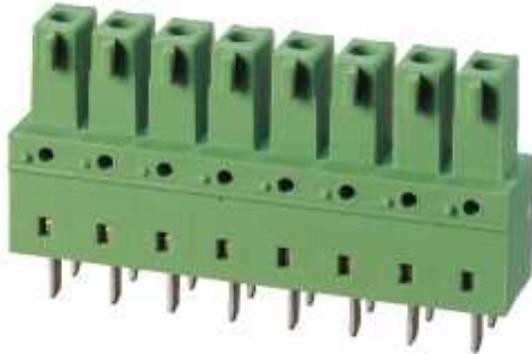

**Pitch: 3.81mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V	
Rated current	8A	
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )		
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )		
Rated surge voltage (UL/IEC/Max.)		
Torque (N-m)		
Screw		
Wire strip length	7~8mm	
Pole	Cat. No.	
02	EC381CV-02P	
:	:	
:	:	
16	EC381CV-16P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw