


Spring plugs for pluggable terminal blocks / ESC & ESD series



ECSH381V

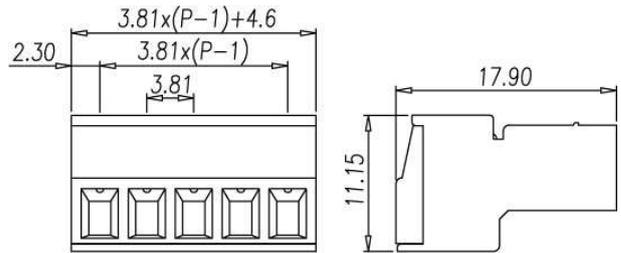

Pitch: 3.81mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	
Rated current	8A	
Conductor cross-section, solid (AWG/ mm ²)	30~14	
Conductor cross-section, flexible (AWG/ mm ²)	30~14	
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / KV	
Torque (N-m)	0.19	
Screw	M2	
Wire strip length		
Pole	Cat. No.	
02	ECSH381V-02P	
:	:	
:	:	
24	ECSH381V-24P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw