



Headers(Sockets) for pluggable terminal blocks / ECH & EHD series

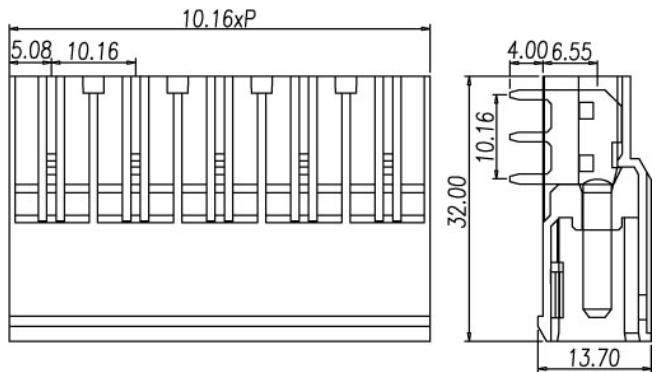

ECH116L

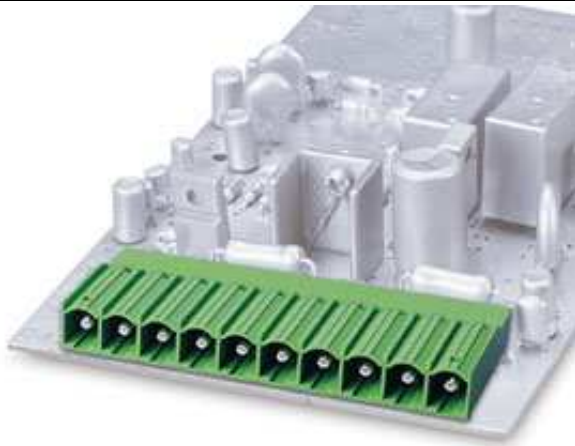

Pitch: 10.16mm

Approval	UL	
Technical Data	UL	IEC
Rated voltage	300V / 600V	750V
Rated current	51A / 5A	76A
Wire range		
Solid wire (AWG)		
Stranded wire (AWG/mm ²)		
Rated surge voltage (UL/IEC/Max.)	2.2 / 3 / KV	
Torque (Lb-in)		
Screw		
Wire strip length		
Pole	Cat. No.	
02	ECH116L-02P	
:	:	
:	:	
10	ECH116L-10P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw