



Headers(Sockets) for pluggable terminal blocks / ECH & EHD series

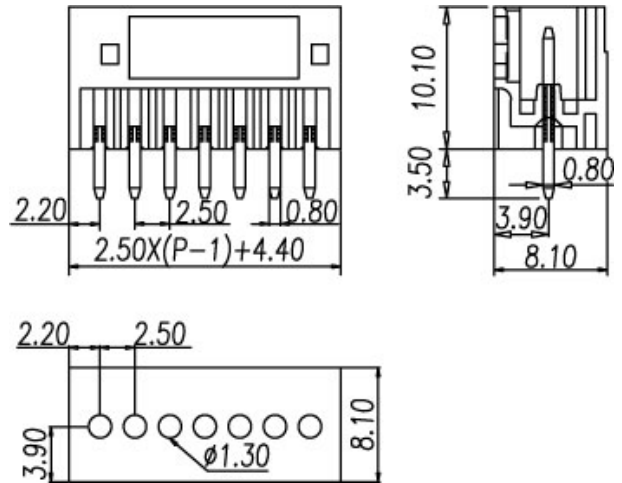

**ECH250V**

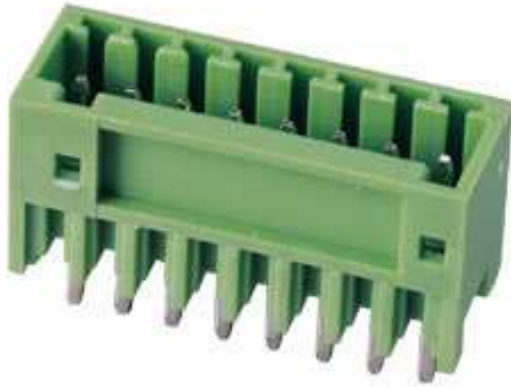

**Pitch: 2.50mm**

|   |                 |      |
|---|-----------------|------|
| Approval  |                 |      |
| Technical Data  | UL              | IEC  |
| Rated voltage   | 150V            | 130V |
| Rated current   | 4A              | 4A   |
| Conductor cross-section, solid (AWG/ mm <sup>2</sup> )    |                 |      |
| Conductor cross-section, flexible (AWG/ mm <sup>2</sup> ) |                 |      |
| Rated surge voltage (UL/IEC/Max.)                         | 1.3 / 1.25 / KV |      |
| Torque (N-m)  |                 |      |
| Screw   |                 |      |
| Wire strip length   |                 |      |
| Pole  | Cat. No.        |      |
| 02  | ECH250V-02P     |      |
| :   | :               |      |
| :   | :               |      |
| 24  | ECH250V-24P     |      |

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw