


Headers(Sockets) for pluggable terminal blocks / ECH & EHD series



**ECH250R**

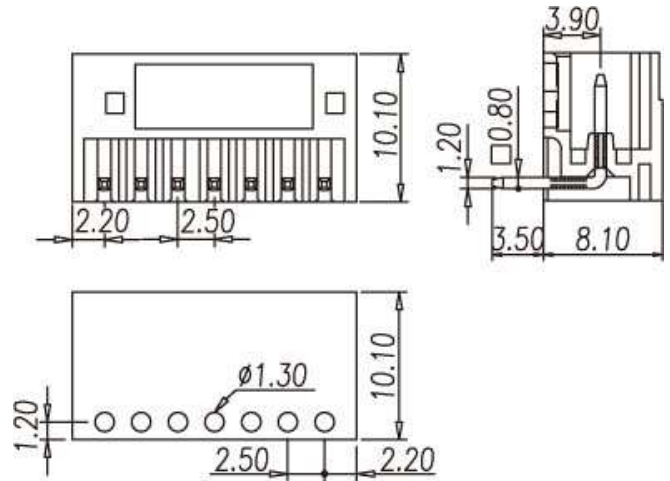

**Pitch: 2.50mm**

Approval	<b>.RJ.</b>	
Technical Data	UL	IEC
Rated voltage	150V	130V
Rated current	4A	4A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )		
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )		
Rated surge voltage (UL/IEC/Max.)	1.3 / 1.25 / KV	
Torque (Lb-in)		
Screw		
Wire strip length		
Pole	Cat. No.	
02	ECH250R-02P	
:	:	
:	:	
24	ECH250R-24P	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw