


Headers(Sockets) for pluggable terminal blocks / ECH & EHD series



**ECH116R**

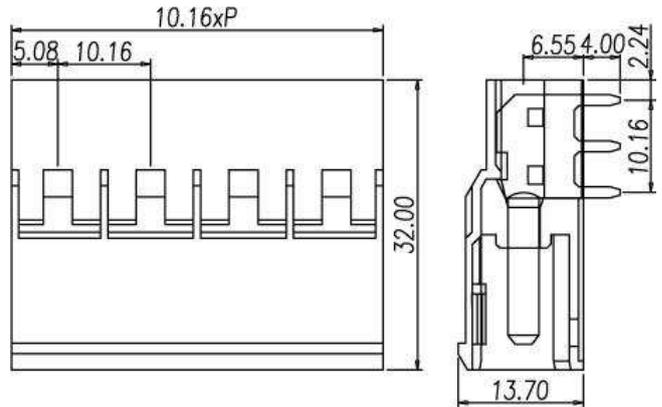

**Pitch: 10.16mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V / 600V	750V
Rated current	51A / 5A	76A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )		
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )		
Rated surge voltage (UL/IEC/Max.)	2.2 / 3 / KV	
Torque (N-m)		
Screw		
Wire strip length		
Pole	Cat. No.	
02	ECH116R-02P	
:	:	
:	:	
10	ECH116R-10P	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw