


Headers(Sockets) for pluggable terminal blocks / ECH & EHD series



**SC508EHM**

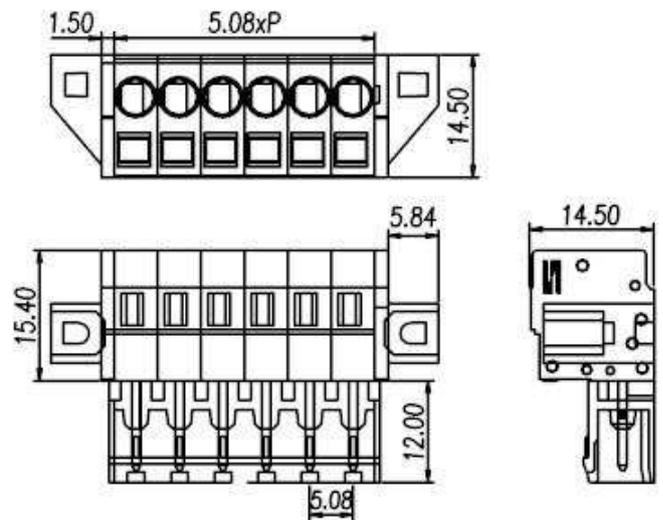

**Pitch: 5.08mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	15A	12A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	28~14 / 0.5~1.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	0.5~1.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 4 KV	
Torque (N-m)		
Screw		
Wire strip length	8~9mm	
Pole	Cat. No.	
01	SC508EHM-01P	
02	SC508EHM-02P	
03	SC508EHM-03P	
:	:	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw