


# Headers(Sockets) for pluggable terminal blocks / ECH & EHD series

## ECH880RT

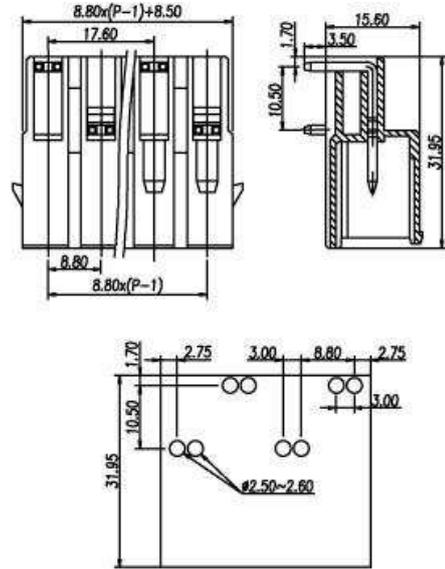

**Pitch: 5.00mm**

Approval		
Technical Data	UL	IEC
Rated voltage	600V	750V
Rated current	65A	57A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )		
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )		
Rated surge voltage (UL/IEC/Max.)	2.2 / 3 / 4 KV	
Torque (N-m)		
Screw		
Wire strip length		
Pole	Cat. No.	
02	ECH880RT-02P	
:	:	
:	:	
12	ECH880RT-12P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw