


Headers(Sockets) for pluggable terminal blocks / ECH & EHD series



**2EHDBV**

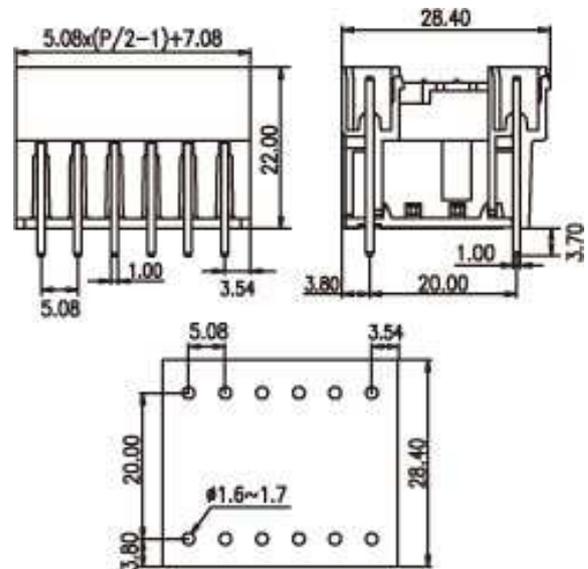

**Pitch: 5.08mm**

| Approval  |                 |      |
|---|-----------------|------|
| Technical Data  | UL              | IEC  |
| Rated voltage   | 300V            | 600V |
| Rated current   | 15A             | 18A  |
| Conductor cross-section, solid (AWG/ mm <sup>2</sup> )    |                 |      |
| Conductor cross-section, flexible (AWG/ mm <sup>2</sup> ) |                 |      |
| Rated surge voltage (UL/IEC/Max.)                         | 1.6 / 4 / 4 KV  |      |
| Torque (N-m)  |                 |      |
| Screw   |                 |      |
| Wire strip length   |                 |      |
| <b>Pole</b>   | <b>Cat. No.</b> |      |
| 2x2   | 2EHDBV-04P      |      |
| :   | :               |      |
| :   | :               |      |
| 24x2  | 2EHDBV-48P      |      |

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw