


## 0147 & 0148 Spring Clamp series



### 0148-41

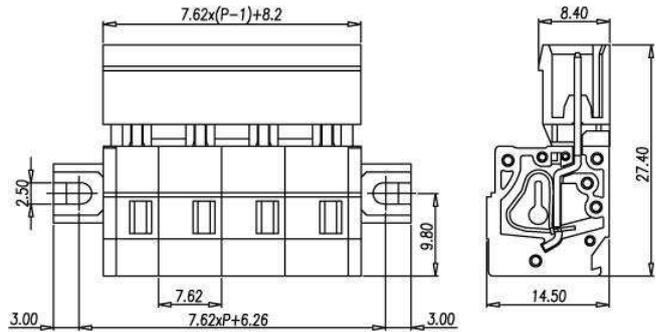

**Pitch: 7.62mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	15A	12A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	28~12	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )		
Rated surge voltage (UL/IEC/Max.)	1.6 / / KV	
Torque (N-m)		
Screw		
Wire strip length	8~9mm	
<b>Pole</b>	<b>Cat. No.</b>	
02	0148-4102	
:	:	
:	:	
12	0148-4112	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw