


## Spring plugs for pluggable terminal blocks / 0147 series



**0147-41**

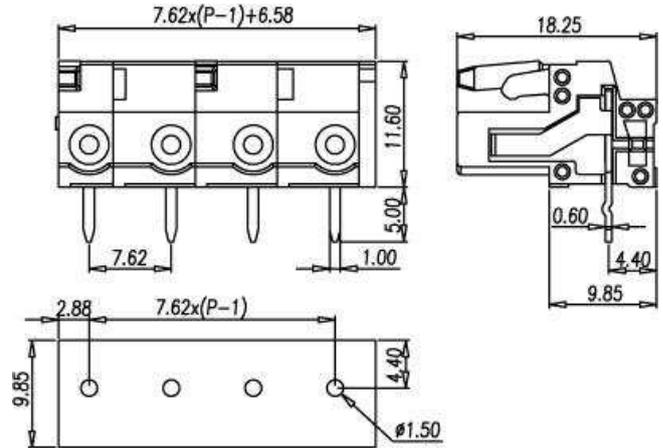

**Pitch: 7.62mm**

| Approval  |  |     |
|---|--|-----|
| Technical Data  | UL   | IEC |
| Rated voltage   | 300V   |     |
| Rated current   | 15A  |     |
| Conductor cross-section, solid (AWG/ mm <sup>2</sup> )    |  |     |
| Conductor cross-section, flexible (AWG/ mm <sup>2</sup> ) |  |     |
| Rated surge voltage (UL/IEC/Max.)                         | 1.6 / / KV   |     |
| Torque (N-m)  |  |     |
| Screw   |  |     |
| Wire strip length   |  |     |
| Pole  | Cat. No.   |     |
| 02  | 0147-4102  |     |
| :   | :  |     |
| :   | :  |     |
| 12  | 0147-4112  |     |

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw