



Spring plugs for pluggable terminal blocks / 0134 series

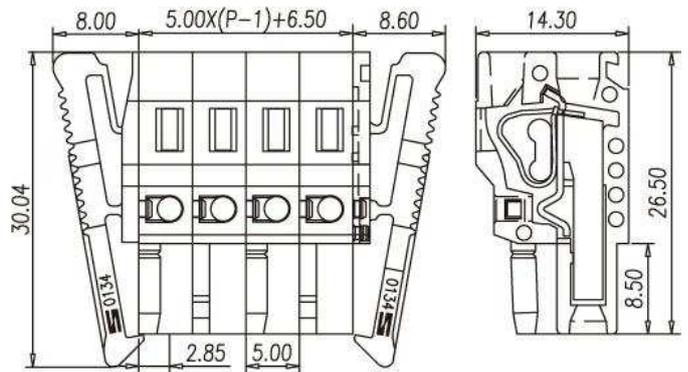

**0134-14**

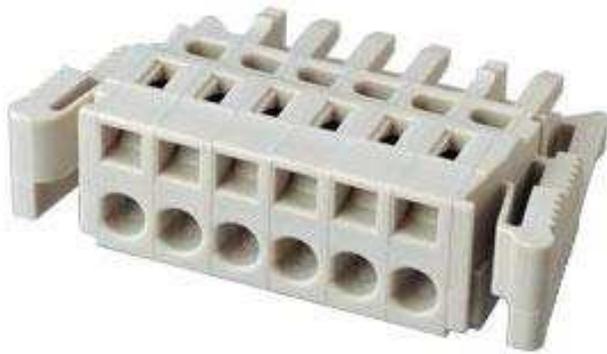

**Pitch: 5.00mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	15A	12A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	26~14 / 0.5~1.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	26~14 / 0.5~1.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / KV	
Torque (N-m)		
Screw		
Wire strip length	10mm	
<b>Pole</b>	<b>Cat. No.</b>	
02	0134-1402	
03	0134-1403	
:	:	
:	:	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw