


Pluggable for Through-hole reflow / THT series



2EHDRT-..PTHT/1.5

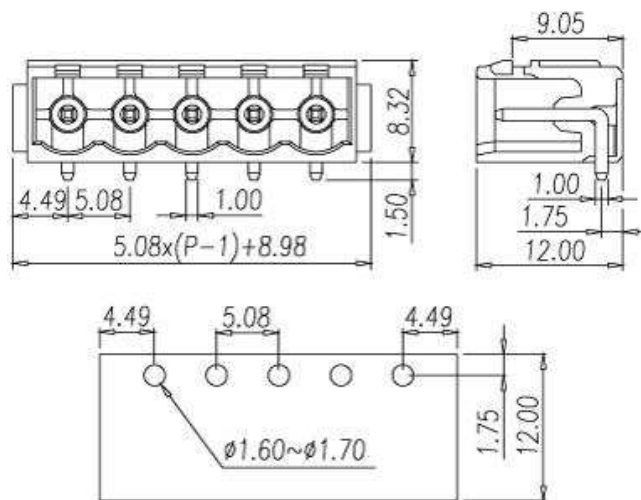

Pitch: 5.08mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	8A	8A
Conductor cross-section, solid (AWG/ mm ²)		
Conductor cross-section, flexible (AWG/ mm ²)		
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / KV	
Torque (N-m)	0.2	
Screw	M2	
Wire strip length	6-7mm	
Pole	Cat. No.	
02	2EHDRT-02PTHT/1.5	
:	:	
:	:	
24	2EHDRT-24PTHT/1.5	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw