


Pluggable for Through-hole reflow / THT series



0221-22XXTHT

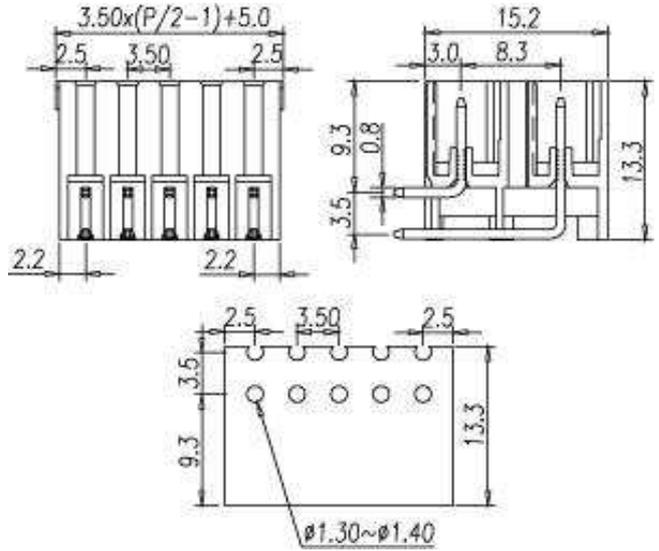

Pitch: 3.50mm

|   |  |      |
|---|--|------|
| Approval  |  |      |
| Technical Data  | UL   | IEC  |
| Rated voltage   | 300V   | 130V |
| Rated current   | 8A   | 8A   |
| Conductor cross-section, solid (AWG/ mm <sup>2</sup> )    |  |      |
| Conductor cross-section, flexible (AWG/ mm <sup>2</sup> ) |  |      |
| Rated surge voltage (UL/IEC/Max.)                         | 1.6 / 1.25 / KV  |      |
| Torque (N-m)  |  |      |
| Screw   |  |      |
| Wire strip length   |  |      |
| <b>Pole</b>   | <b>Cat. No.</b>  |      |
| 2X2   | 0221-2204THT   |      |
| :   | :  |      |
| :   | :  |      |
| 24X2  | 0221-2248THT   |      |

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw