


**0156 S-Cage series**

**0156-24XX**

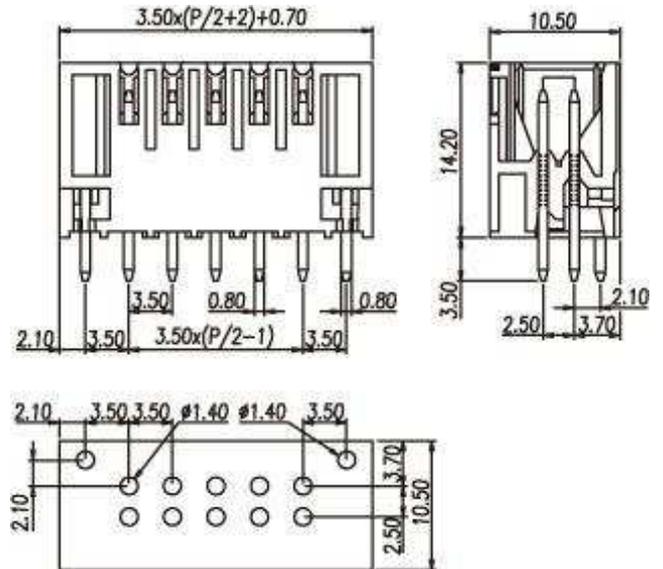

**Pitch: 3.50mm**

Approval	 	
Technical Data	UL	IEC
Rated voltage	150V	320V
Rated current	8A	10A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )		
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )		
Rated surge voltage (UL/IEC/Max.)		
Torque (N-m)		
Screw		
Wire strip length		
<b>Pole</b>	<b>Cat. No.</b>	
3X2	0156-2406	
:	:	
:	:	
20X2	0156-2440	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw