


## 0156 S-Cage series



**0156-25XX**

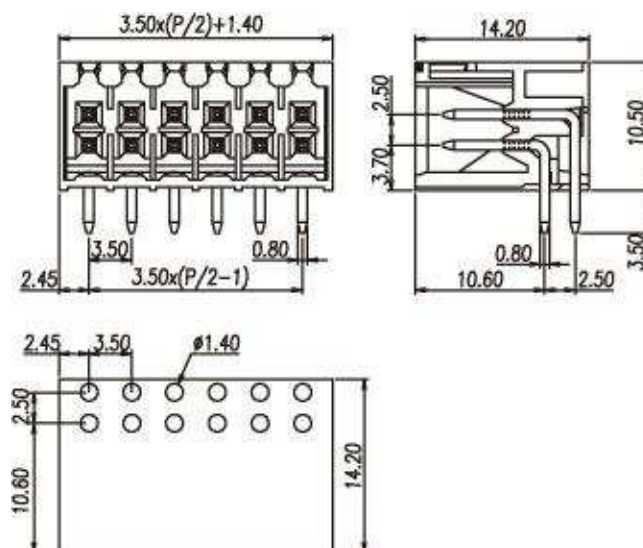

## Pitch: 3.50mm

| Approval                                                  |   |      |
|-----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| Technical Data                                            | UL                                                                                                                                                                         | IEC  |
| Rated voltage                                             | 150V                                                                                                                                                                       | 320V |
| Rated current                                             | 8A                                                                                                                                                                         | 10A  |
| Conductor cross-section, solid (AWG/ mm <sup>2</sup> )    |                                                                                                                                                                            |      |
| Conductor cross-section, flexible (AWG/ mm <sup>2</sup> ) |                                                                                                                                                                            |      |
| Rated surge voltage (UL/IEC/Max.)                         |                                                                                                                                                                            |      |
| Torque (N-m)                                              |                                                                                                                                                                            |      |
| Screw                                                     |                                                                                                                                                                            |      |
| Wire strip length                                         |                                                                                                                                                                            |      |
| <b>Pole</b>                                               | <b>Cat. No.</b>                                                                                                                                                            |      |
| 3X2                                                       | 0156-2506                                                                                                                                                                  |      |
| :                                                         | :                                                                                                                                                                          |      |
| :                                                         | :                                                                                                                                                                          |      |
| 20X2                                                      | 0156-2544                                                                                                                                                                  |      |

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** [info@dinkle.com.tw](mailto:info@dinkle.com.tw)