


Wire protector type terminal blocks / ED series



ED130T

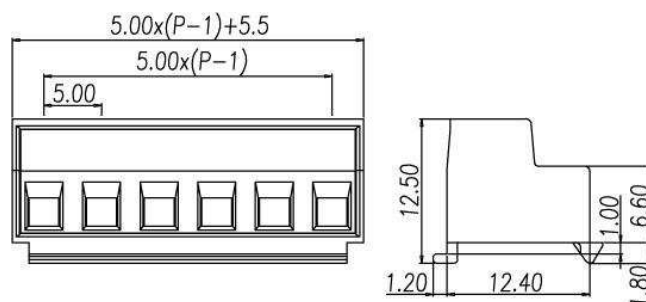

Pitch: 5.00mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	
Rated current	12A	
Conductor cross-section, solid (AWG/ mm ²)	22~14	
Conductor cross-section, flexible (AWG/ mm ²)	22~14	
Rated surge voltage (UL/IEC/Max.)	1.6 // KV	
Torque (N-m)	0.31	
Screw	M2.5	
Wire strip length	5~6mm	
Pole	Cat. No.	
02	ED130T-02P	
:	:	
:	:	
20	ED130T-20P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw