


Wire protector type terminal blocks / ED series



ED130A

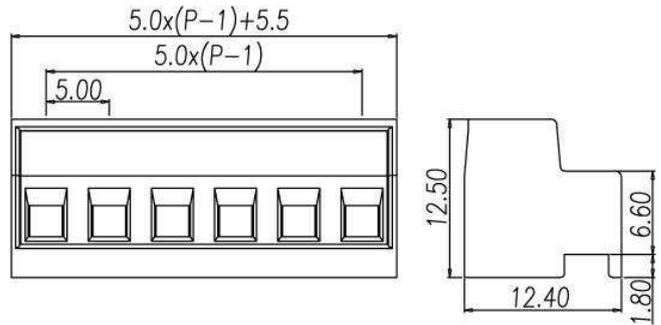

Pitch: 5.00mm

| Approval | | |
|---|------------|-----|
| Technical Data | UL | IEC |
| Rated voltage | 300V | |
| Rated current | 12A | |
| Conductor cross-section, solid (AWG/ mm ²) | 22~14 | |
| Conductor cross-section, flexible (AWG/ mm ²) | 22~14 | |
| Rated surge voltage (UL/IEC/Max.) | 1.6 // KV | |
| Torque (N-m) | 0.31 | |
| Screw | M2.5 | |
| Wire strip length | 5~6mm | |
| Pole | Cat. No. | |
| 02 | ED130A-02P | |
| : | : | |
| : | : | |
| 20 | ED130A-20P | |

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw