


Front entry type terminal blocks / DT-23 series



**DT-2301**

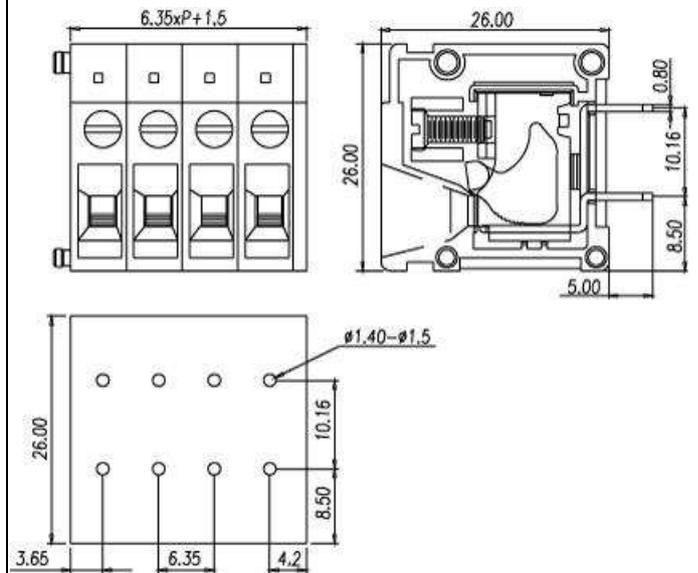

**Pitch: 6.35mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	33A	24A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	22~10 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	22~10 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 4 KV	
Torque (N-m)	0.59	
Screw	M3	
Wire strip length	10~11mm	
<b>Pole</b>	<b>Cat. No.</b>	
02	DT-2301-02P	
:	:	
:	:	
16	DT-2301-16P	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw