Front entry type terminal blocks ／ DT-123 series

DT-123VB

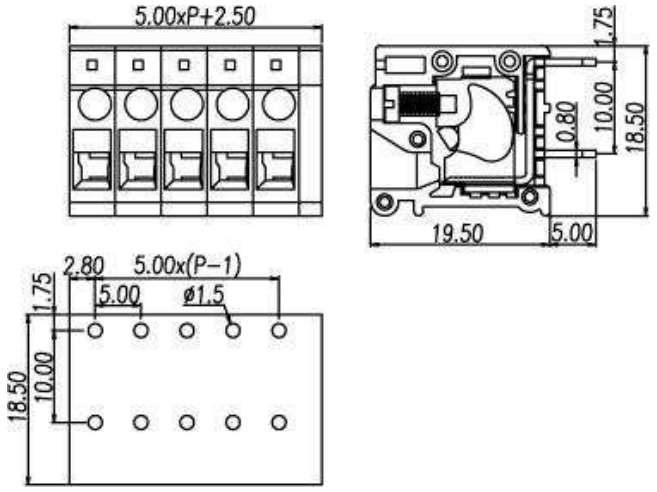

Pitch: 5.00mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	20A/26A	24A
Conductor cross-section, solid (AWG/ mm^2)	22~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm^2)	22~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / KV	
Torque (N-m)	0.5	
Screw	M2.5	
Wire strip length		

Pole	Cat. No.
02	DT-123VB-02P
:	:
:	:
24	DT-123VB-24P

TEL: +886-2-2908-0614 **FAX:** +886-2-2908-8549 **E-mail:** info@dinkle.com.tw

Copyright DINKLE ENTERPRISE CO., LTD. All Right Reserved.