


Front entry type terminal blocks / DT-123 series



DT-123RA-..P3

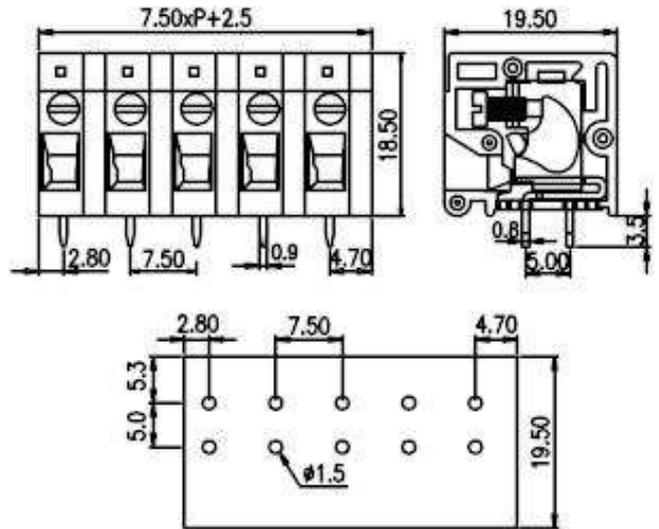

Pitch: 7.50mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	750V
Rated current	20A	24A
Conductor cross-section, solid (AWG/ mm ²)	22~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG/ mm ²)	22~12 / 0.5~2.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / 4 KV	
Torque (N-m)	0.5	
Screw	M2.5	
Wire strip length	13~15mm	
Pole	Cat. No.	
02	DT-123RA-02P3	
:	:	
:	:	
24	DT-123RA-24P3	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw