


# European P.C.B. type terminal blocks / PDS series



## PDS-10H

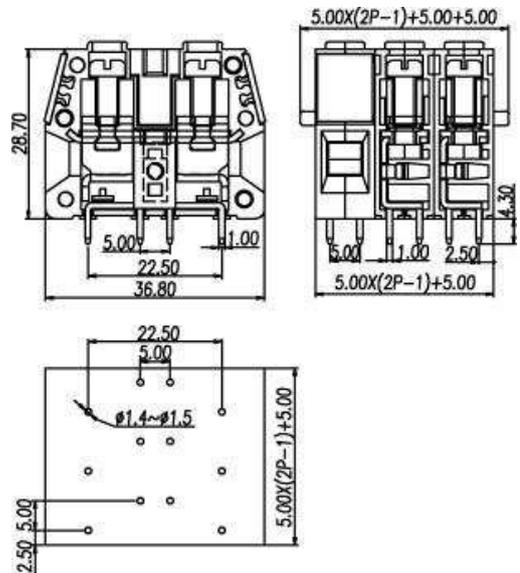

**Pitch: 10.00mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	65A	57A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	24~6 / 0.5~10	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	24~6 / 0.5~10	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / KV	
Torque (N-m)	1.47	
Screw	M4	
Wire strip length	12~13mm	
Pole	Cat. No.	
01	PDS-10H-01	
02	PDS-10H-02	
03	PDS-10H-03	
:	:	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw