


European P.C.B. type terminal blocks / EK series



EPK635VS-..P2

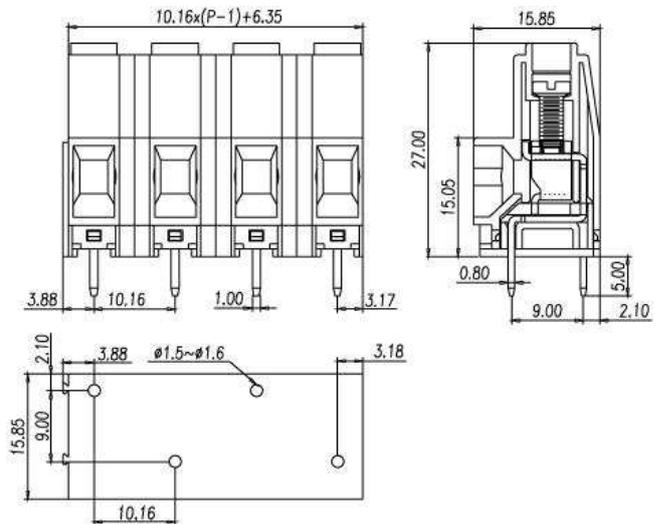

Pitch: 10.16mm

Approval		
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	35A	41A
Conductor cross-section, solid (AWG/ mm ²)	18~8 / 0.2~6	
Conductor cross-section, flexible (AWG/ mm ²)	18~8 / 0.2~6	
Rated surge voltage (UL/IEC/Max.)	2.2 / 3.5 / KV	
Torque (N-m)	0.50	
Screw	M3	
Wire strip length	7~8mm	
Pole	Cat. No.	
02	EPK635VS-02P2	
:	:	
:	:	
16	EPK635VS-16P2	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw