


European P.C.B. type terminal blocks / EK series



**EPK635VN-..P2**

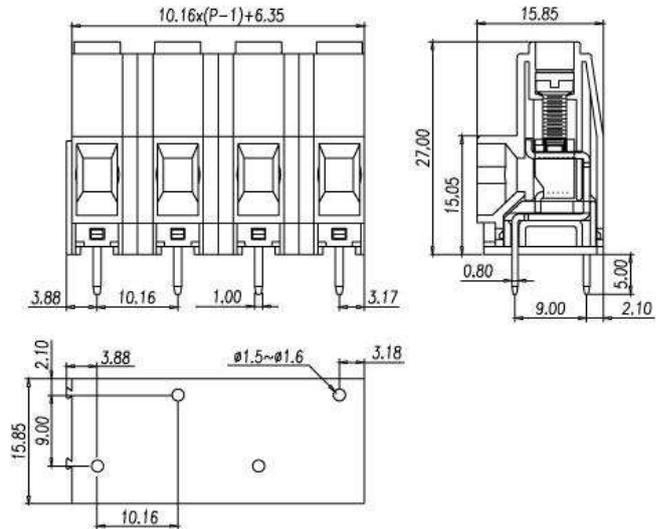

**Pitch: 10.16mm**

Approval		
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	35A	41A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	18~8 / 0.2~6	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	18~8 / 0.2~6	
Rated surge voltage (UL/IEC/Max.)	2.2 / 3.5 / KV	
Torque (N-m)	0.50	
Screw	M3	
Wire strip length	10mm	
<b>Pole</b>	<b>Cat. No.</b>	
02	EPK635VN-02P2	
:	:	
:	:	
16	EPK635VN-16P2	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw