


European P.C.B. type terminal blocks / EK series



ESK116V-..P3

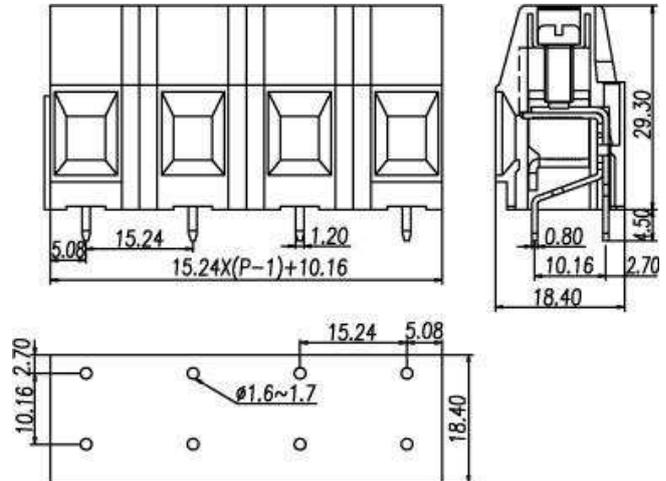

Pitch: 15.24mm

Approval	 	
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	65A	57A
Conductor cross-section, solid (AWG/ mm ²)	20~6 / 0.5~10	
Conductor cross-section, flexible (AWG/ mm ²)	20~6 / 0.5~10	
Rated surge voltage (UL/IEC/Max.)	2.2 / 3 / KV	
Torque (N-m)	1.76	
Screw	M4	
Wire strip length	10~11mm	
Pole	Cat. No.	
02	ESK116V-02P3	
03	ESK116V-03P3	
:	:	
:	:	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw