


European P.C.B. type terminal blocks / EK series



**ESK116V-..P2**

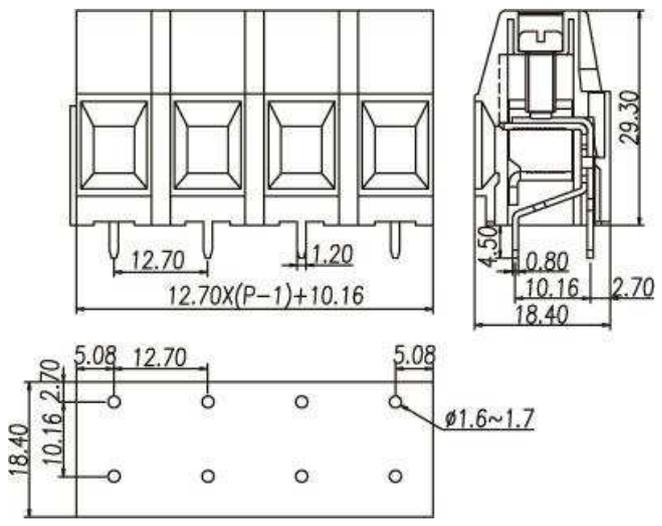

**Pitch: 12.70mm**

Approval		
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	65A	57A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	20~6 / 0.5~10	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	20~6 / 0.5~10	
Rated surge voltage (UL/IEC/Max.)	2.2 / / KV	
Torque (N-m)	1.76	
Screw	M4	
Wire strip length		
<b>Pole</b>	<b>Cat. No.</b>	
02	ESK116V-02P2	
03	ESK116V-03P2	
:	:	
:	:	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw