


European P.C.B. type terminal blocks / EK series



ESKW116V

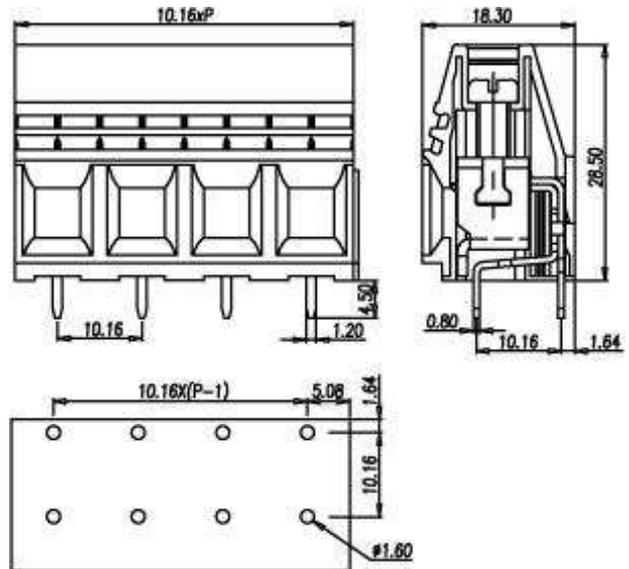

Pitch: 10.16mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	
Rated current	65A	
Conductor cross-section, solid (AWG/ mm ²)	26~6	
Conductor cross-section, flexible (AWG/ mm ²)		
Rated surge voltage (UL/IEC/Max.)	1.6 / / KV	
Torque (N-m)	2.30	
Screw	M4	
Wire strip length		
Pole	Cat. No.	
02	ESKW116V-02P	
03	ESKW116V-03P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw