


European P.C.B. type terminal blocks / EK series



ESK116R-..PAM

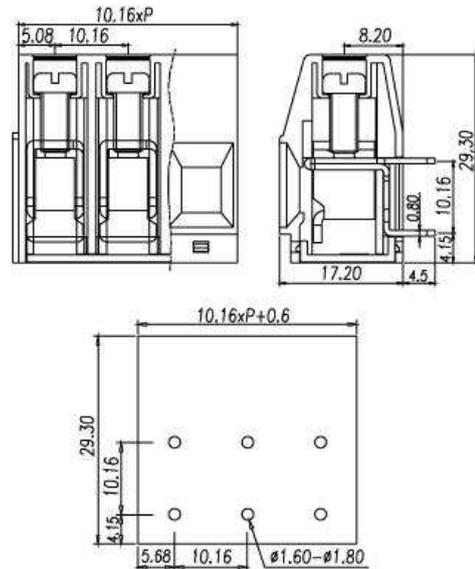

Pitch: 10.16mm

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V / 600V	750V
Rated current	65A / 5A	57A
Conductor cross-section, solid (AWG/ mm ²)	20~6 / 0.5~10	
Conductor cross-section, flexible (AWG/ mm ²)	20~6 / 0.5~10	
Rated surge voltage (UL/IEC/Max.)	2.2 / 3 / KV	
Torque (N-m)	1.76	
Screw	M4	
Wire strip length	11mm	
Pole	Cat. No.	
02,03	ESK116R-02P,03P	
04	ESK116R-04PAM	
:	:	
:	:	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw