


European P.C.B. type terminal blocks / EK series



**ESK381V4L**

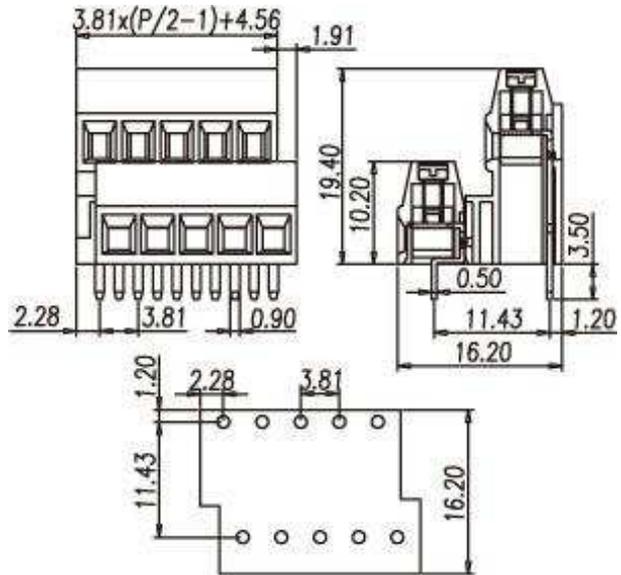

**Pitch: 3.81mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	12A	12A
Conductor cross-section, solid (AWG/ mm <sup>2</sup> )	30~14 / 0.5~1.5	
Conductor cross-section, flexible (AWG/ mm <sup>2</sup> )	30~14 / 0.5~1.5	
Rated surge voltage (UL/IEC/Max.)	1.6 / 1.25 / 3 KV	
Torque (N-m)	1.73	
Screw	M2	
Wire strip length	6~7mm	
<b>Pole</b>	<b>Cat. No.</b>	
2x2	ESK381V4L-04P	
:	:	
:	:	
24x2	ESK381V4L-48P	

**TEL:** +886-2-2908-0614

**FAX:** +886-2-2908-8549

**E-mail:** info@dinkle.com.tw