


European P.C.B. type terminal blocks / EK series



E2HK508V-..PAM

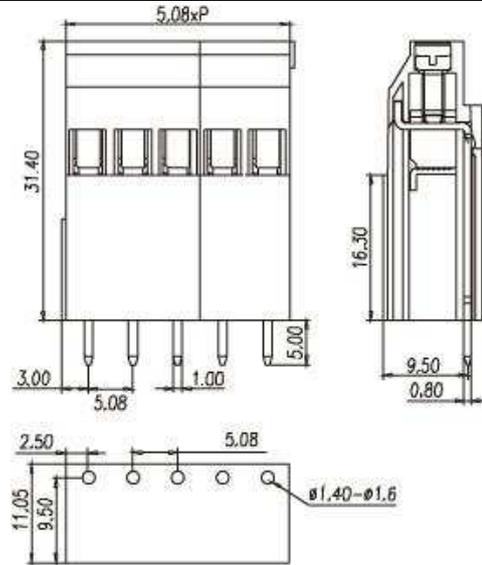

Pitch: 5.08mm

| Approval |  | |
|---|--|------|
| Technical Data | UL | IEC |
| Rated voltage | 300V | 250V |
| Rated current | 25A | 24A |
| Conductor cross-section, solid (AWG/ mm ²) | 24~12 / 0.5~2.5 | |
| Conductor cross-section, flexible (AWG/ mm ²) | 24~12 / 0.5~2.5 | |
| Rated surge voltage (UL/IEC/Max.) | 1.6 / / KV | |
| Torque (N-m) | 0.45 | |
| Screw | M2.5 | |
| Wire strip length | 6~7mm | |
| Pole | Cat. No. | |
| 02 | E2HK508V-02PAM | |
| 03 | E2HK508V-03PAM | |
| : | : | |
| : | : | |

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw