


European P.C.B. type terminal blocks / EK series



E2LK508V

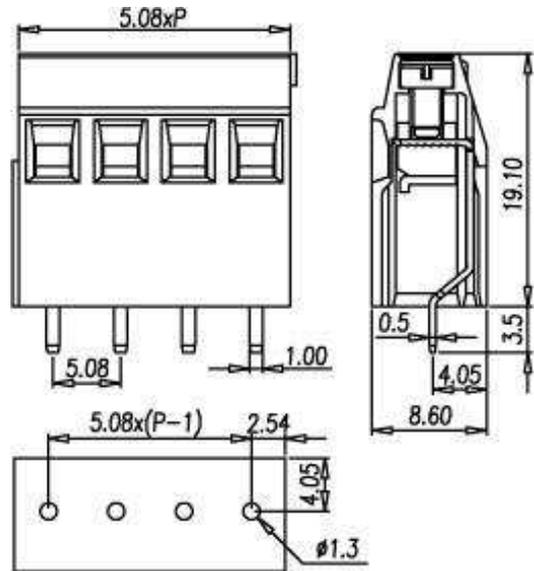

Pitch: 5.08mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	
Rated current	13.5A	
Conductor cross-section, solid (AWG/ mm ²)	30~14	
Conductor cross-section, flexible (AWG/ mm ²)	30~14	
Rated surge voltage (UL/IEC/Max.)	1.6 / / KV	
Torque (N-m)	0.29	
Screw		
Wire strip length		
Pole	Cat. No.	
02	E2LK508V-02P	
:	:	
:	:	
24	E2LK508V-24P	

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: info@dinkle.com.tw