


## European P.C.B. type terminal blocks / EK series



### EELK508V-..P(B)

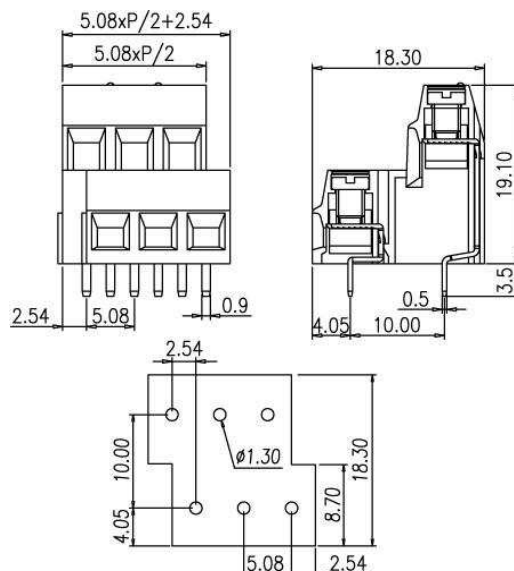

**Pitch: 5.08mm**

| Approval                                                  |    |      |
|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| Technical Data                                            | UL                                                                                                                                                                                                                                                              | IEC  |
| Rated voltage                                             | 300V                                                                                                                                                                                                                                                            | 250V |
| Rated current                                             | 13.5A                                                                                                                                                                                                                                                           | 14A  |
| Conductor cross-section, solid (AWG/ mm <sup>2</sup> )    | 26~18 / 0.5~1.5                                                                                                                                                                                                                                                 |      |
| Conductor cross-section, flexible (AWG/ mm <sup>2</sup> ) | 26~18 / 0.5~1.5                                                                                                                                                                                                                                                 |      |
| Rated surge voltage (UL/IEC/Max.)                         | 1.6 / 2 / 3 KV                                                                                                                                                                                                                                                  |      |
| Torque (N-m)                                              | 0.56                                                                                                                                                                                                                                                            |      |
| Screw                                                     | M3                                                                                                                                                                                                                                                              |      |
| Wire strip length                                         | 6~7mm                                                                                                                                                                                                                                                           |      |
| Pole                                                      | Cat. No.                                                                                                                                                                                                                                                        |      |
| 2X2                                                       | EELK508V-04P(B)                                                                                                                                                                                                                                                 |      |
| :                                                         | :                                                                                                                                                                                                                                                               |      |
| :                                                         | :                                                                                                                                                                                                                                                               |      |
| 16X2                                                      | EELK508V-32P(B)                                                                                                                                                                                                                                                 |      |

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: [info@dinkle.com.tw](mailto:info@dinkle.com.tw)